



LOCUS MAP

N.T.S. 

LIST OF DRAWINGS

	TOPOGRAPHIC SURVEY
SP1.1	SITE PREPARATION PLAN
SP1.2	SITE PREPARATION DETAILS
L1.1	LAYOUT AND MATERIALS PLAN
L2.1	GRADING AND UTILITY PLAN
L3.1	PLANTING PLAN AND DETAILS
L4.1	DETAIL SHEET I

BID DOCUMENTS | JULY 23, 2025

TOWN OF READING
READING PUBLIC LIBRARY | TERRACE AND
LANDSCAPE IMPROVEMENTS
READING, MA

OWNER

Town of Reading
16 Lowell Street
Reading, MA 01867
(781) 942-9001

LANDSCAPE ARCHITECT/CIVIL ENGINEER

Activitas
70 Milton Street
Dedham, MA 02026
(781) 326-2600

SURVEY

Reed Land Surveying, Inc.
109 Rhode Island Road, Suite 4A
Lakeville, MA 02347
(508) 932-1181

TOWN OF READING
READING PUBLIC LIBRARY | TERRACE AND
LANDSCAPE IMPROVEMENTS


BID DOCUMENTS | JULY 23, 2025

REVISIONS:			PROJECT NO. 25020.00
NO.	DATE	SHEETS REVISED	NOTES

ACTIVITAS
landscape architecture | civil engineering

VERTICAL CONTROL FOR SITE – TEMPORARY BENCHMARKS (TBM)
TBM "A": COTTON GIN SPINDLE IN UTILITY POLE #2 ELEVATION = 146.93 (N.A.V.D. 88)
TBM "B": COTTON GIN SPINDLE IN UTILITY POLE ELEVATION = 153.56 (N.A.V.D. 88)


1. THE VERTICAL DATUM OF THIS SURVEY IS THE NORTH AMERICAN VERTICAL DATUM OF 1988 (N.A.V.D. 88). THE ELEVATIONS WERE DERIVED FROM GPS MEASUREMENTS REFERENCED TO THE MASSACHUSETTS CONTINUOUSLY OPERATING REFERENCE STATION NETWORK (MACORS).
2. THE COORDINATES SHOWN HEREON AND BASIS OF THE BEARINGS AND DISTANCES REFERENCED TO THE MASSACHUSETTS STATE PLANE COORDINATE SYSTEM (MAINLAND - NORTH AMERICAN DATUM OF 1983). THE COORDINATES WERE DERIVED FROM GPS MEASUREMENTS REFERENCED TO THE MASSACHUSETTS CONTINUOUSLY OPERATING REFERENCE STATION NETWORK (MACORS).
3. THE FIELD SURVEY FOR THIS PROJECT WAS COMPLETED ON MARCH 28, 2025.
4. THE UTILITIES LOCATIONS AND SIZES AS SHOWN HEREON ARE BASED ON SURFACE EVIDENCE AND ARE APPROXIMATE. DIG SAFE SHOULD BE CALLED PRIOR TO ANY EXCAVATIONS.

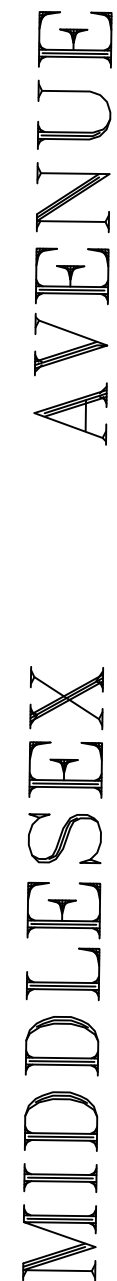

LEGEND	
THESE STANDARD SYMBOLS & ABBREVIATIONS MAY BE FOUND IN THE DRAWING	
	STREET SIGN
	FIRE HYDRANT
	FIRE ALARM POLE
	COMMUNICATIONS MANHOLE
	DRAIN MANHOLE
	ELECTRIC MANHOLE
	SEWER MANHOLE
	TELEPHONE MANHOLE
	WATER MANHOLE
	CATCH BASIN
	ELECTRIC BOX/MTR
	GAS METER
	GAS GATE
	WATER GATE
	UTILITY GATE
	WATER HAND HOLE
	ELECTRIC HAND HOLE
	GAS HAND HOLE
	HVAC UNIT
	UTILITY POLE
	LIGHT POLE
	SPOTLIGHT
	GUY POLE
	GUY WIRE
	BOUND
	BOUND W/ DRILL HOLE
	DHIP
	BOULDER
	POST/BOLLARD
	PARKING SPOTS
	BUSH/SHRUB
	CONIFEROUS TREE
	DECIDUOUS TREE
	IRRIGATION CTRL BOX
	PIPE CONTINUATION UNKNOWN
	PROPANE CYLINDER
	BITUMINOUS CONC. BERM
	BOTTOM OF CURB
	BOTTOM OF WALL
	CAPE COD BERM
	CAST IRON
	CONCRETE
	REINFORCED PLASTIC PIPE
	DUCTILE IRON
	DRILL HOLE
	12\"/>
	12\"/>
	EDGE OF PAVEMENT
	EXISTING
	FOUND
	GUY WIRE
	PIPE HOOD/BELL
	IRON PIPE
	LANDSCAPED AREA
	MONITORING WELL
	NO PIPES VISIBLE
	PIPE INACCESSIBLE
	ROOF DRAIN
	REINFORCED CONCRETE PIPE
	RETAINING
	STONE BOUND DRILL HOLE
	STONE BOUND X-CUT
	SLOPED GRANITE CURB
	TOP OF CURB
	TOP OF WALL
	ADA TACTILE WARNING PAD
	UTILITY POLE
	VITRIFIED CLAY
	VERTICAL CONCRETE CURB
	VERTICAL GRANITE CURB
	WOOD
	WROUGHT IRON



Glen D. Reed
GLEN D. REED, P.L.S. LICENSE NO. 40766
AS AGENT FOR REED LAND SURVEYING, INC.
NOT INDIVIDUALLY

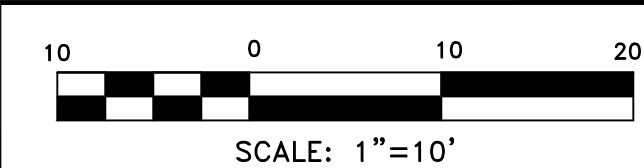

Reed

Land Surveying, Inc.

109 RHODE ISLAND ROAD, SUITE 4A
LAKEVILLE, MASSACHUSETTS 02347
(508) 923-1181 FAX. (508) 923-1191

© 2025 REED LAND SURVEYING, INC.


TOPOGRAPHIC
SURVEY
READING PUBLIC
LIBRARY
64 MIDDLESEX AVENUE
READING, MASSACHUSETTS
(MIDDLESEX COUNTY)
PREPARED FOR
ACTIVITAS INC.

FILE: 25010 TOPO

APRIL 21, 2025

SITE PREPARATION NOTES

- | | | | |
|----|--|-----|--|
| 1. | EXISTING CONDITIONS INFORMATION IS REPRODUCED FROM THE SURVEY PREPARED BY REED LAND SURVEYING INC., LOCATED AT 109 RHODE ISLAND ROAD, SUITE 4A, LAKEVILLE, MA, AND DATED APRIL 21, 2025. | 9. | THE CONTRACTOR SHALL INSTALL CONSTRUCTION FENCING PER THE PLANS AND SPECIFICATIONS. CONTRACTOR MUST TAKE APPROPRIATE MEASURES TO MAINTAIN A SECURE SITE THROUGHOUT THE PROJECT. |
| 2. | THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS IN THE FIELD AND REPORT ANY DISCREPANCIES BETWEEN PLANS, SPECIFICATIONS, AND ACTUAL CONDITIONS TO THE LANDSCAPE ARCHITECT/CIVIL ENGINEER FOR CLARIFICATION AND RESOLUTION PRIOR TO STARTING WORK. | 10. | CONTRACTOR SHALL REVIEW EROSION CONTROL INSTALLATION METHOD. REPRESENTATIVES FROM THE TOWN OF READING CONSERVATION COMMISSION SHALL BE INCLUDED IN PRE-CONSTRUCTION MEETING AND MAY BE ON SITE WITH LANDSCAPE ARCHITECT DURING THE INSTALLATION OF EROSION CONTROL AND SITE PREPARATION. |
| 3. | THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO EXISTING CONDITIONS TO REMAIN THAT ARE DUE TO CONTRACTOR OPERATIONS. | 11. | EXISTING DRAINAGE SYSTEM BASINS SHALL REMAIN OPERATIONAL AS LONG AS POSSIBLE. UPON REMOVAL OF EXISTING BASINS, CONTRACTOR SHALL PROVIDE TEMPORARY INFILTRATION AREAS TO INFILTRATE CONSTRUCTION RUNOFF. CONTRACTOR SHALL FOCUS ON GETTING PROPOSED DRAINAGE SYSTEMS INSTALLED AS SOON AS POSSIBLE. CONTRACTOR SHALL ENSURE ALL STORMWATER FLOWING TO NEW BASINS IS TREATED STORMWATER THAT WILL NOT NEGATIVELY AFFECT THE FINAL SYSTEMS. |
| 4. | ALL ITEMS TO BE REMOVED THAT ARE NOT STOCKPILED FOR LATER REUSE ON THE PROJECT OR FOR DELIVERY TO THE OWNER SHALL BE LEGALLY DISPOSED OF OFF SITE BY THE CONTRACTOR. | 12. | ALL TREE PROTECTION TO BE REVIEWED IN THE FIELD WITH TOWN TREE WARDEN AND LANDSCAPE ARCHITECT PRIOR TO MOBILIZATION. |
| 5. | THE LOCATIONS OF UNDERGROUND UTILITIES SHOWN ON THIS PLAN ARE BASED ON THE SURVEY REFERENCED. THE CONTRACTOR SHALL CONTACT DIGSAFE AND THE PROPER AGENCY OR RESPECTIVE UTILITY COMPANIES TO CONFIRM THE LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. ANY DAMAGE DUE TO FAILURE OF THE CONTRACTOR TO CONTACT THE PROPER AUTHORITIES SHALL BE BORNE BY THE CONTRACTOR. | 13. | TRUCKS LEAVING THE SITE SHALL HAVE THEIR WHEELS WASHED PRIOR TO LEAVING THE CONSTRUCTION AREA. ANY TRACKING OUTSIDE THE PROJECT LIMIT OF WORK SHALL BE STREET SWEEP AS NECESSARY (MINIMUM SWEEP PARKING LOT DAILY). |
| 6. | THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING HIS EFFORTS OF THE DEMOLITION WITH ALL TRADES. | 14. | ATTENTION IS CALLED TO RECORD DRAWINGS AND AS-BUILT DRAWING REQUIREMENTS IN THE SPECIFICATIONS. CONTRACTOR SHALL DOCUMENT ALL UTILITY STOPS AND ABANDONED UNDERGROUND UTILITIES FOUND IN THE FIELD IN THE AS-BUILT AND RECORD DRAWINGS. |
| 7. | THE CONTRACTOR SHALL COORDINATE ALL ADJUSTMENTS OR ABANDONMENT OF UTILITIES WITH THE RESPECTIVE UTILITY COMPANY. | 15. | DUE TO PROJECT PROXIMITY TO ABUTTING RESIDENTIAL PROPERTIES, THE CONTRACTOR SHALL MITIGATE AND CONTROL DUST DURING EARTHWORK OPERATIONS AND THROUGHOUT THE PROJECT AS DEEMED NECESSARY BY THE TOWN AND LANDSCAPE ARCHITECT. |
| 8. | THE CONTRACTOR SHALL MAINTAIN OR ADJUST TO NEW FINISH GRADE (AS NECESSARY) ALL UTILITY AND SITE STRUCTURES SUCH AS MANHOLES, CATCH BASINS, ETC. FROM MAINTAINED UTILITY AND SITE SYSTEMS UNLESS OTHERWISE NOTED OR DIRECTED BY THE LANDSCAPE ARCHITECT. | | |

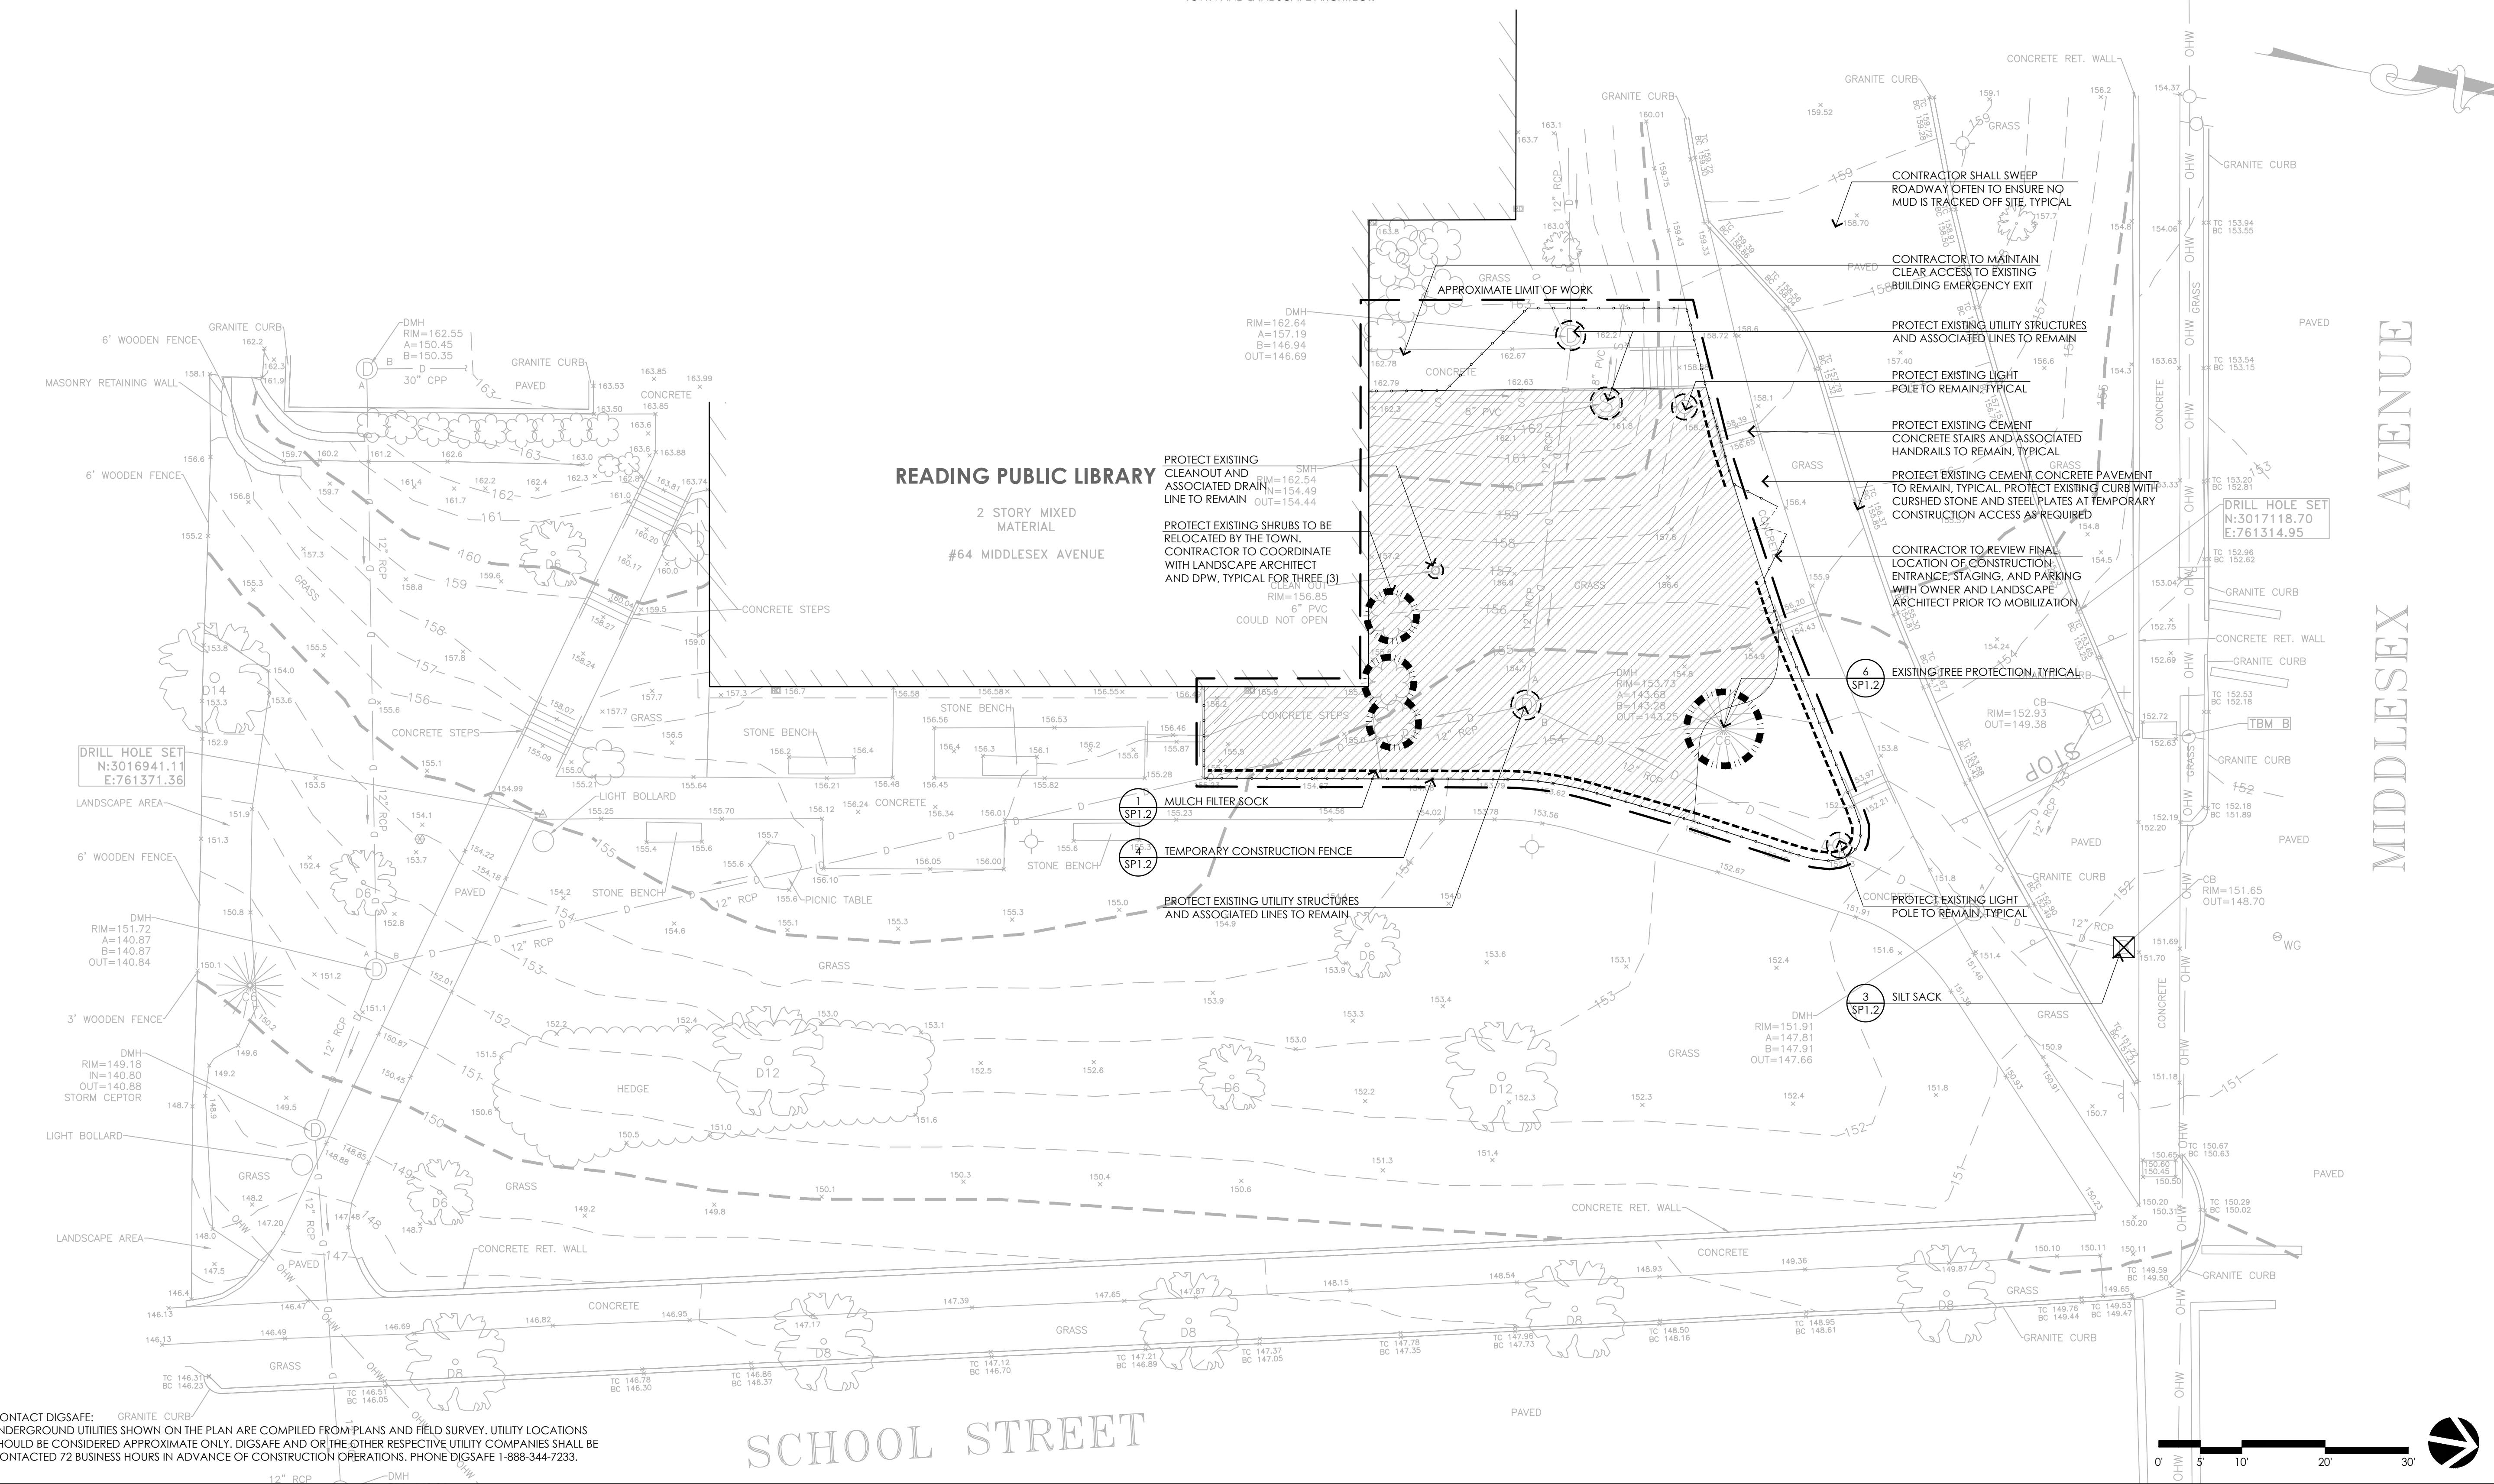

CONSULTANTS

SURVEY -
REED LAND SURVEYING INC

READING PUBLIC LIBRARY

Reading, Massachusetts

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

[illegible]


SCALE:	1"=10'-0"
PROJECT NO.:	25020.00
FILE:	25020.00-SP1.1-SP_PLAN.dwg
DRAWN:	AJA
CHECKED:	SRC/HCG

SEAL:



SHEET TITLE:
SITE PREPARATION PLAN

SHEET NO:

SP1.1

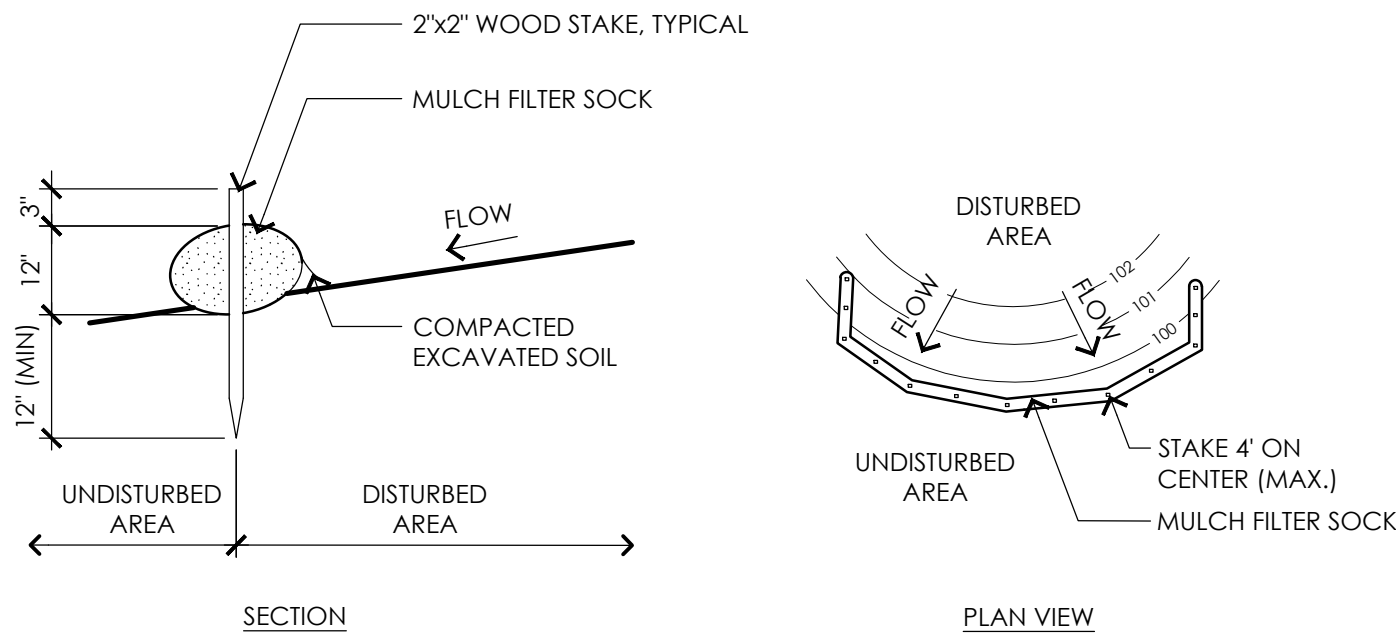

- NOTES:
1. PLACE MULCH FILTER SOCK ON LEVEL GRADE. EXTEND BOTH ENDS OF THE TUBE AT LEAST 8'-0" UPSLOPE AT 45 DEGREES TO THE MAIN ALIGNMENT.
 2. REMOVE DEPOSITS WHEN SEDIMENT ACCUMULATION IS ONE THIRD THE HEIGHT OF THE EXPOSED MULCH FILTER SOCK OR ONE HALF OF THE EXPOSED FILTER SOCK.
 3. MULCH FILTER SOCK SHALL REMAIN IN WORKING ORDER UNTIL THE SITE IS STABILIZED. ADDITIONAL EROSION CONTROLS SHALL BE INSTALLED AS NEEDED TO PREVENT SILT FROM LEAVING THE SITE AT NO ADDITIONAL COST TO THE OWNER.
 4. ALL CONTROLS SHALL BE SET 5' FROM BOTTOM TOE OF SLOPE

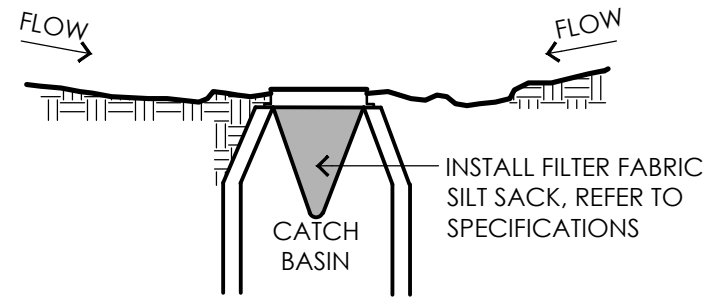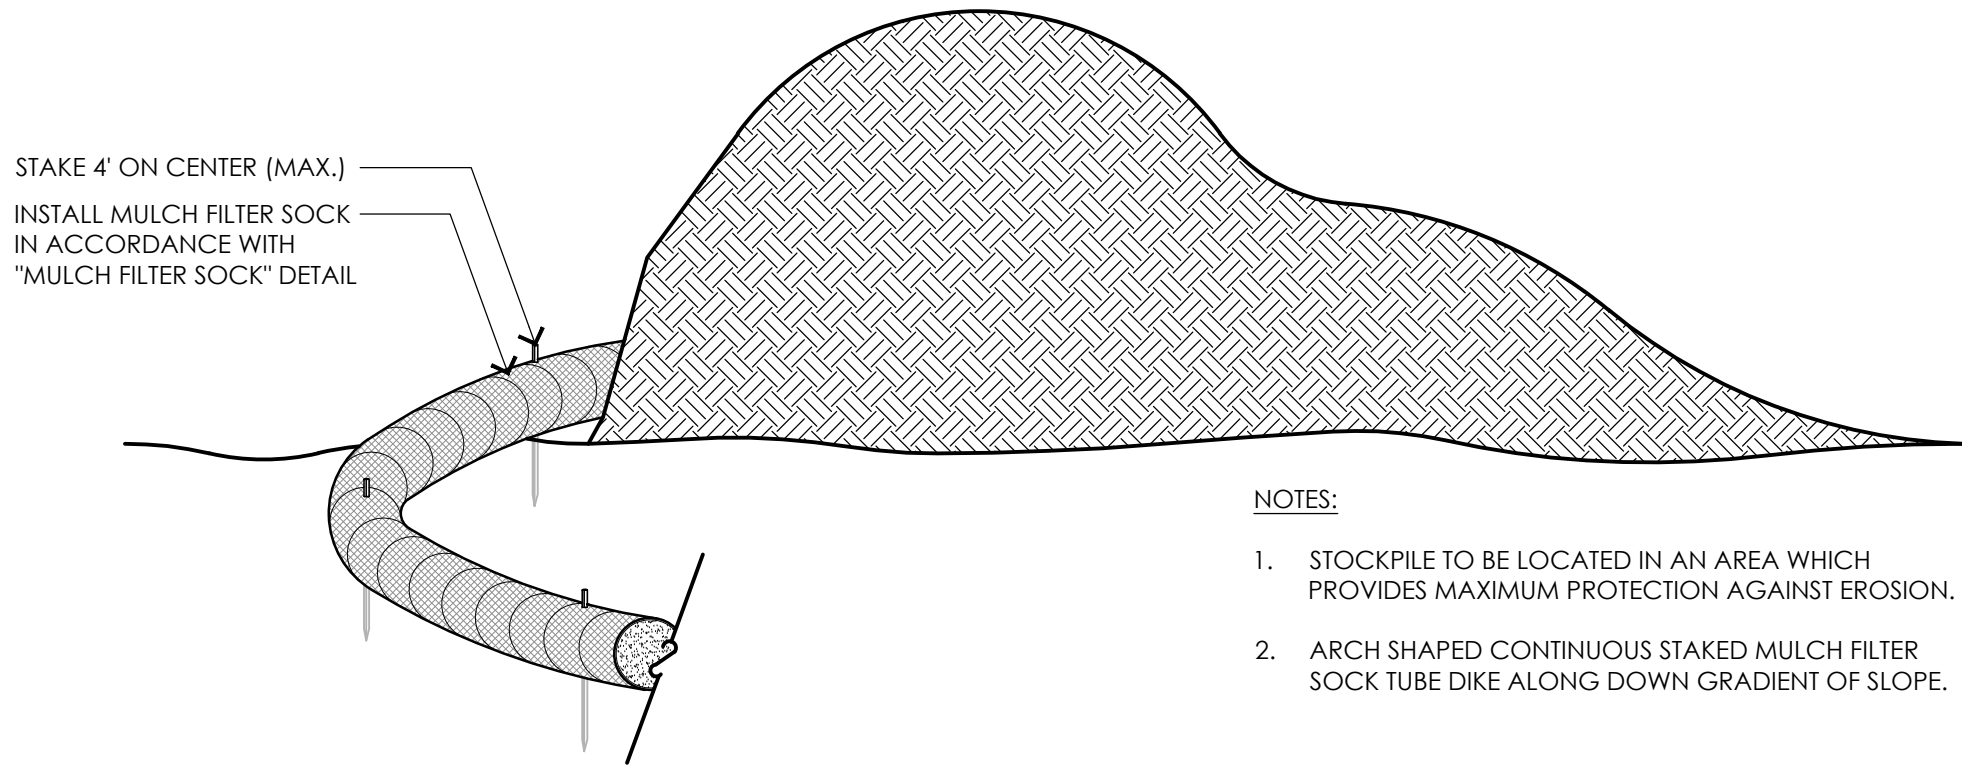

1 MULCH FILTER SOCK


NOT TO SCALE

2 TEMPORARY MATERIAL STOCKPILE

NOT TO SCALE


3 SILT SACK

NOT TO SCALE

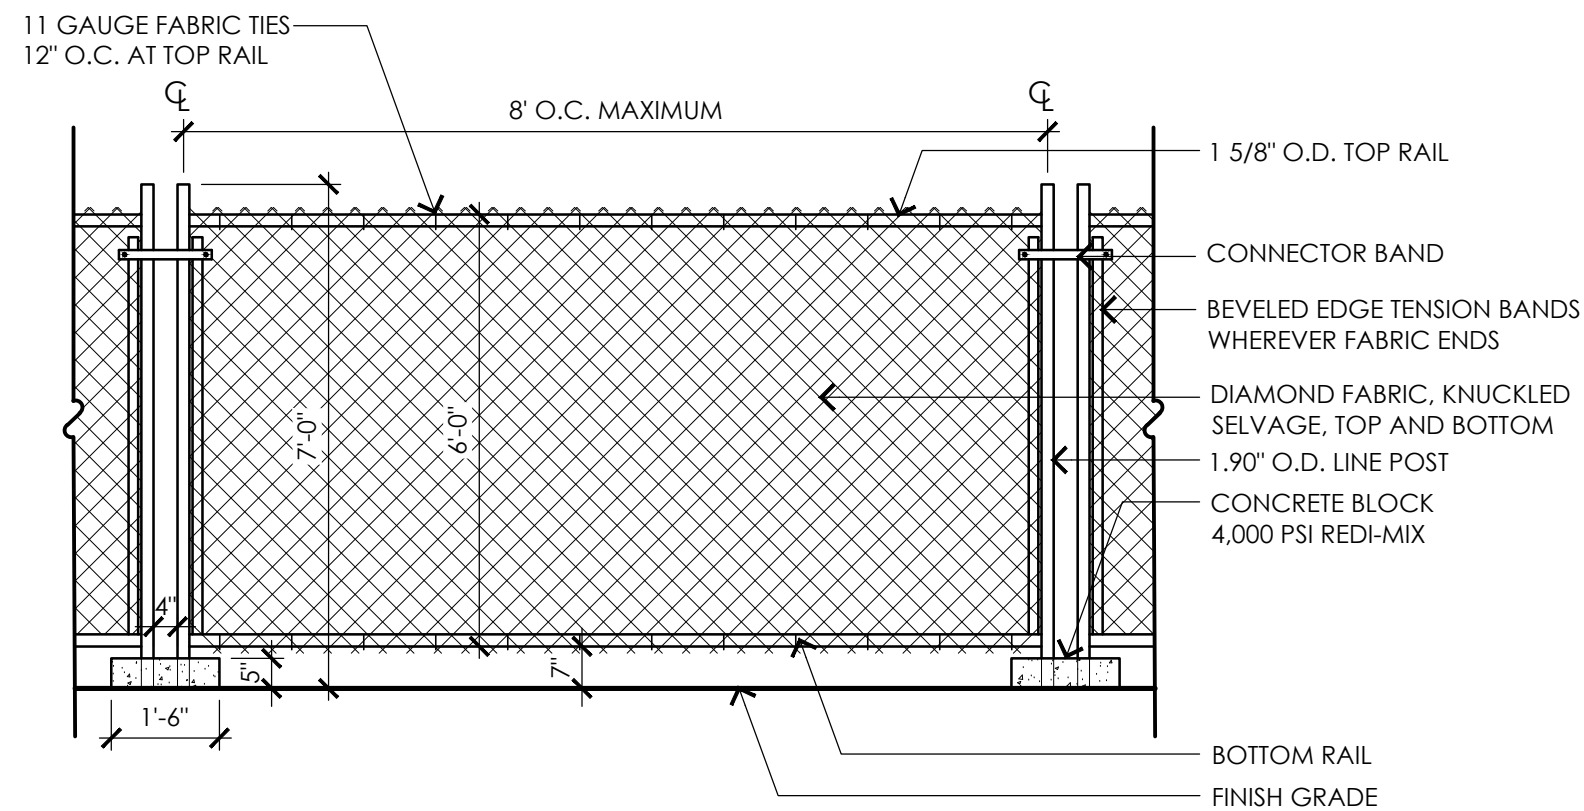

- NOTES:
1. TEMPORARY CONSTRUCTION FENCE SHALL BE PROVIDED AT PROJECT LIMITS AS SHOWN ON THE SITE PREPARATION PLAN AND AS SPECIFIED. CONTRACTOR PROPOSED MODIFICATIONS TO TEMPORARY CONSTRUCTION FENCE, SUCH AS BUT NOT LIMITED TO THE USE OF SNOW FENCE (OR SIMILAR) WILL NOT BE CONSIDERED, UNLESS OTHERWISE NOTED.
 2. POST SPACING SHALL BE EQUIDISTANT.
 3. CONTRACTOR SHALL MAINTAIN A SECURE SITE AT ALL TIMES. CONTRACTOR SHALL PROVIDE ADDITIONAL TEMPORARY CONSTRUCTION FENCE AT NO ADDITIONAL COST TO THE OWNER IF NECESSARY TO PROPERLY SECURE THE SITE.

- NOTES:
1. ENTRANCE WIDTH SHALL BE A TWENTY-FIVE (25) FOOT MINIMUM, BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS. CONTRACTOR SHALL REVIEW FINAL LOCATION AND SIZE ON TEMPORARY CONSTRUCTION ENTRANCE WITH OWNER AND LANDSCAPE ARCHITECT PRIOR TO MOBILIZATION.
 2. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH SHALL PREVENT TRACKING OR FLOWING OF SEDIMENT INTO RIGHT-OF-WAY OR ADJACENT PARKING AREAS AND DRIVES. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND AND REPAIR OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED AND/OR TRACKED ONTO PUBLIC RIGHTS-OF-WAYS OR ADJACENT PARKING AREAS AND DRIVES MUST BE REMOVED IMMEDIATELY. MOUNTABLE BERM SHALL BE PERMITTED. PERIODIC INSPECTION AND MAINTENANCE SHALL BE PROVIDED.
 3. CONTRACTOR SHALL WASH WHEELS OF VEHICLES AT CONSTRUCTION ENTRANCE PRIOR TO VEHICLES EXITING SITE TO PREVENT SOIL MATERIAL FROM BEING TRACKED FROM THE SITE.
 4. PERIODIC INSPECTION AND MAINTENANCE SHALL BE PROVIDED.

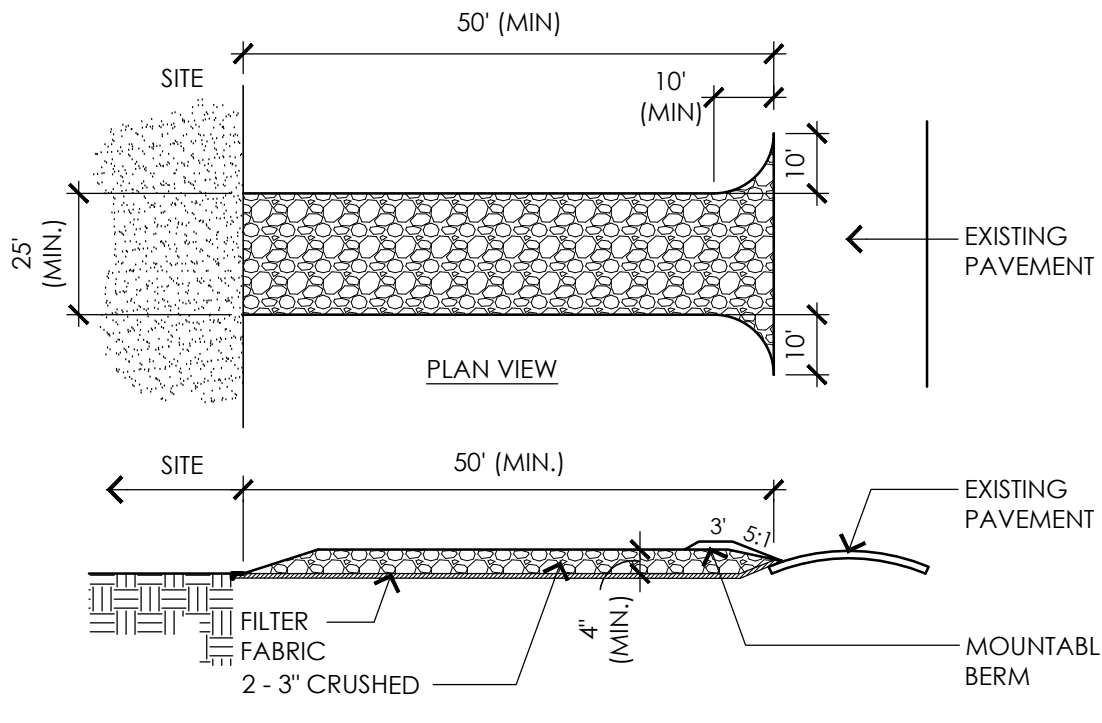



4 TEMPORARY CONSTRUCTION FENCE

NOT TO SCALE

5 TEMPORARY CONSTRUCTION ENTRANCE (IF NEEDED)

NOT TO SCALE

ALL TREE PROTECTION AND PROPOSED REMOVALS TO BE REVIEWED IN THE FIELD WITH TOWN TREE WARDEN AND LANDSCAPE ARCHITECT PRIOR TO MOBILIZATION

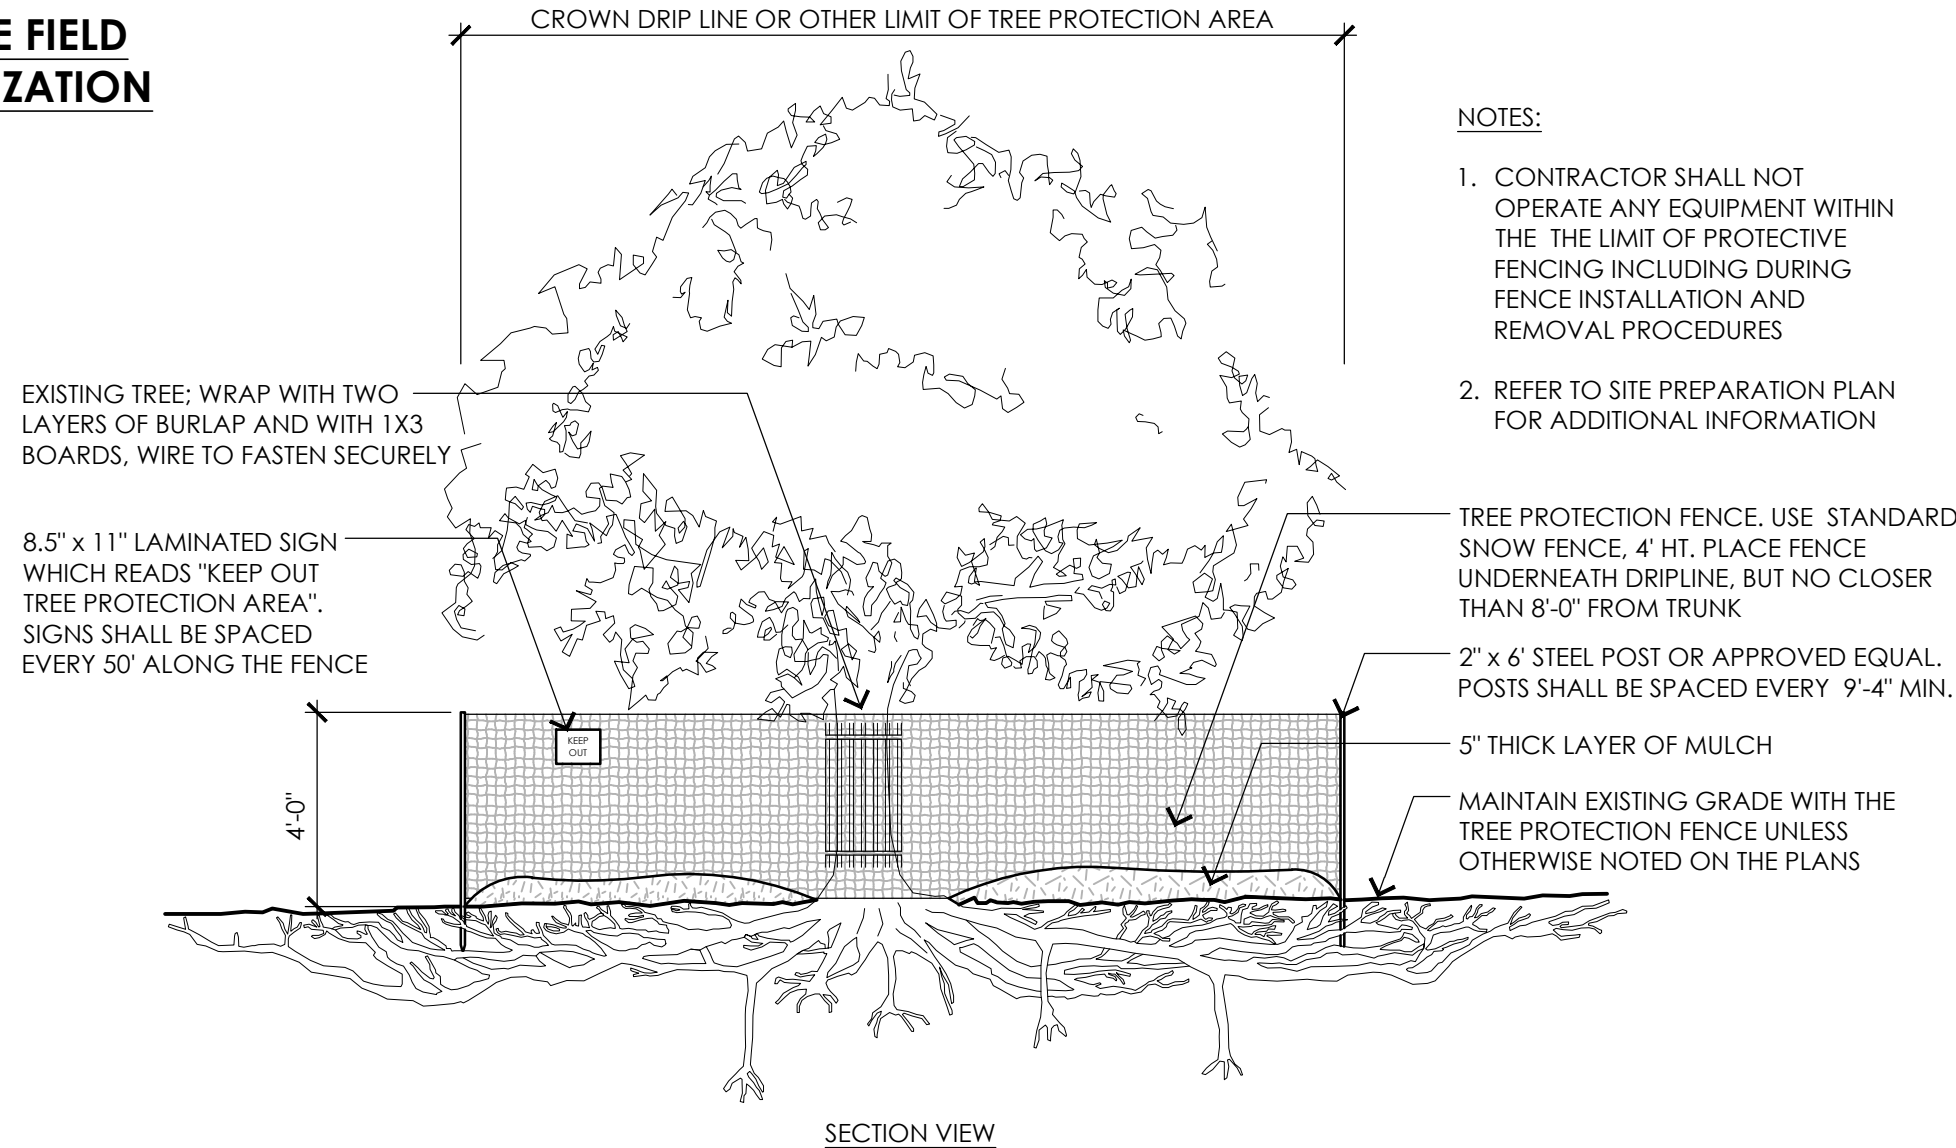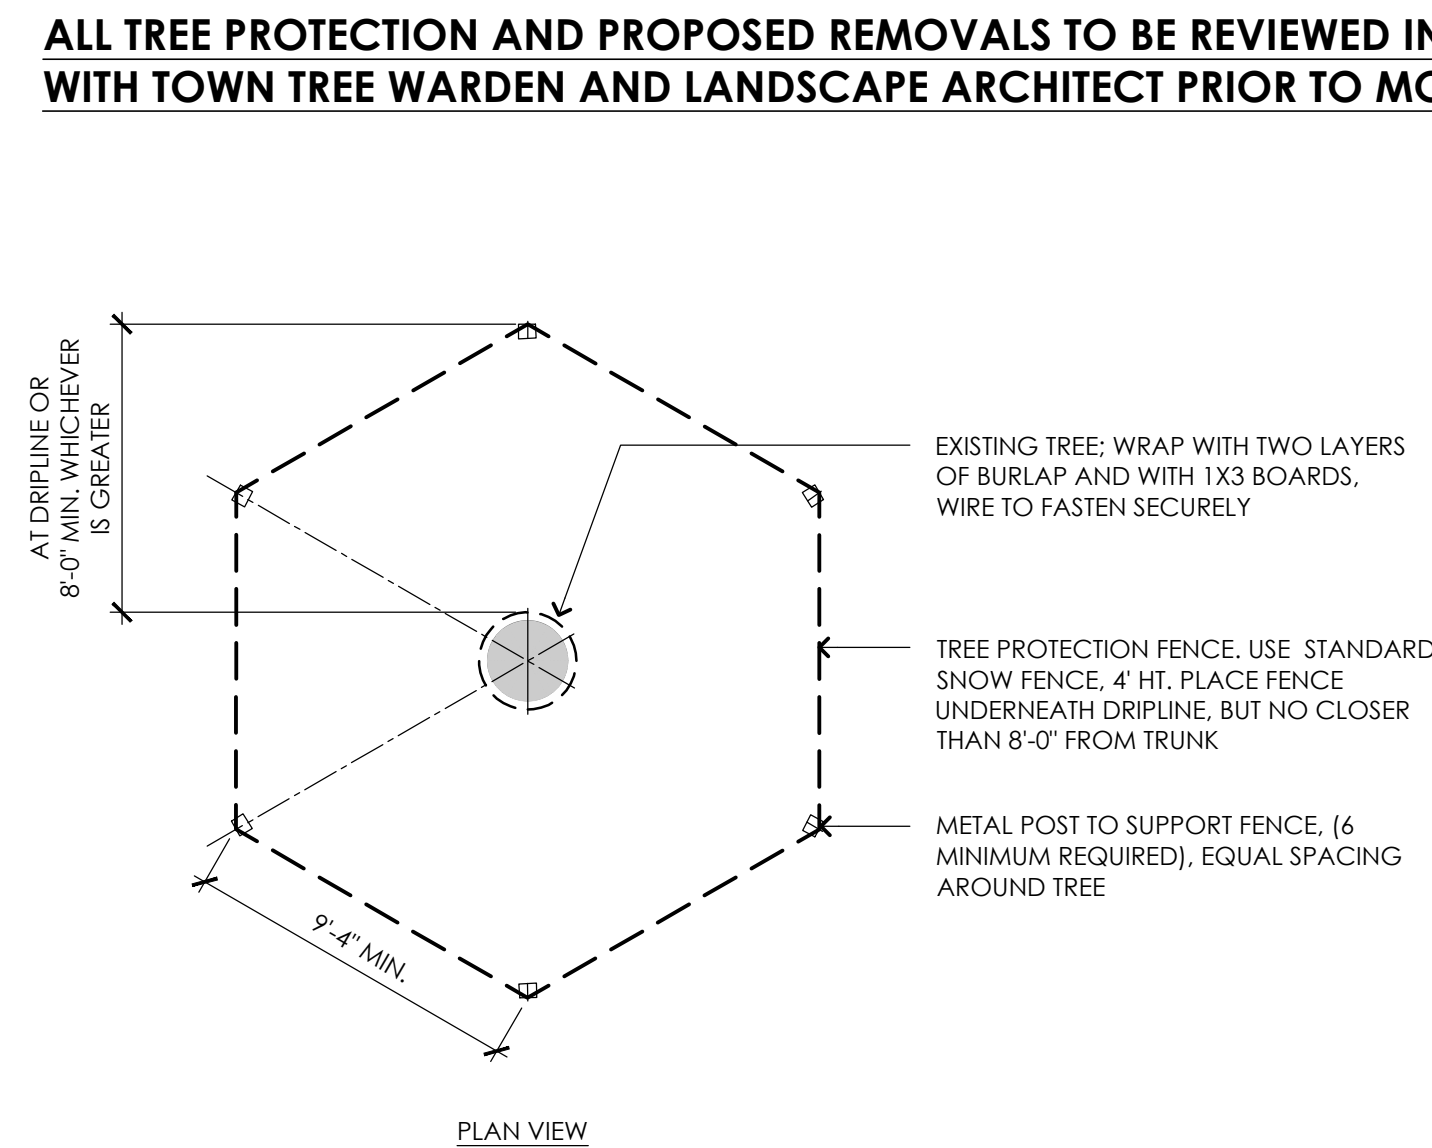

6 EXISTING TREE PROTECTION

NOT TO SCALE

CONSULTANTS

SURVEY -
REED LAND SURVEYING INC.

READING PUBLIC LIBRARY

Reading, Massachusetts

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

REVISIONS:

NO.	DATE	DESCRIPTION

SCALE:	AS NOTED
PROJECT NO.:	25020.00
FILE:	25020.00-SP1.2-SP_DET.dwg
DRAWN:	AJA
CHECKED:	SRC/HCG

SEAL:


SHEET TITLE:

SITE PREPARATION
DETAILS

SHEET NO:


SP1.2

LAYOUT AND MATERIALS LEGEND

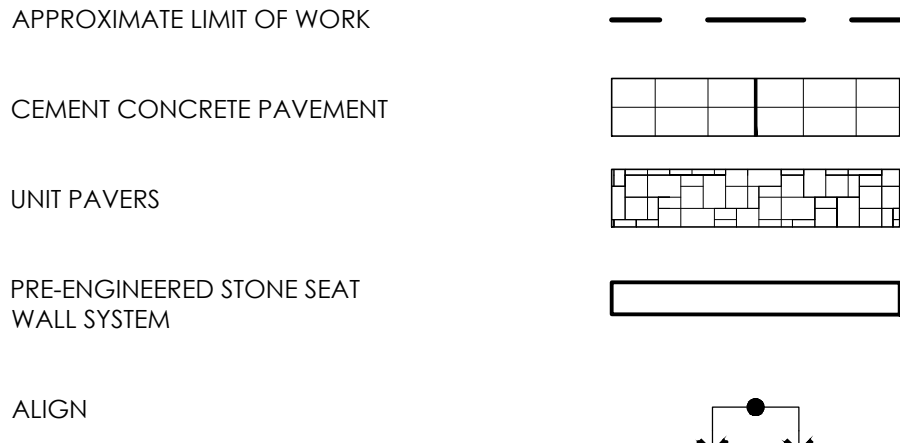

LAYOUT AND MATERIALS NOTES

- EXISTING CONDITIONS INFORMATION IS REPRODUCED FROM THE SURVEY PREPARED BY REED LAND SURVEYING INC., LOCATED AT 109 RHODE ISLAND ROAD, SUITE 4A, LAKEVILLE, MA, AND DATED APRIL 21, 2025.
- THE LOCATIONS OF UNDERGROUND UTILITIES SHOWN ARE BASED ON THE SURVEY REFERENCED ABOVE. THE CONTRACTOR SHALL NOTIFY DIGSAFE AND THE PROPER LOCAL AUTHORITIES OR RESPECTIVE UTILITY COMPANIES TO CONFIRM THE LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. ANY DAMAGE DUE TO FAILURE OF THE CONTRACTOR TO CONTACT THE PROPER AUTHORITIES SHALL BE BORNE BY THE CONTRACTOR.
- CONTRACTOR(S) SHALL THOROUGHLY FAMILIARIZE THEMSELVES WITH ALL CONSTRUCTION DOCUMENTS, SPECIFICATIONS, AND SITE CONDITIONS PRIOR TO BIDDING AND PRIOR TO CONSTRUCTION.
- ANY DISCREPANCIES BETWEEN DRAWINGS, SPECIFICATIONS, AND SITE CONDITIONS SHALL BE REPORTED IMMEDIATELY TO THE OWNER'S REPRESENTATIVE FOR CLARIFICATION AND RESOLUTION PRIOR TO BIDDING OR CONSTRUCTION.
- WHILE THE CONTRACTOR MAY USE THE ELECTRONIC DRAWINGS FOR LAYOUT PURPOSES, IT IS HIS RESPONSIBILITY TO CHECK ALL LAYOUT IN THE FIELD TO CONFIRM CONFORMITY WITH THE PROJECT DRAWINGS, SPECIFICATIONS, AND APPROVED SHOP DRAWINGS AND SUBMITTALS. USE OF ONLY THE ELECTRONIC DRAWINGS WITHOUT A SITE CHECK OF LAYOUT IS NOT ACCEPTABLE.

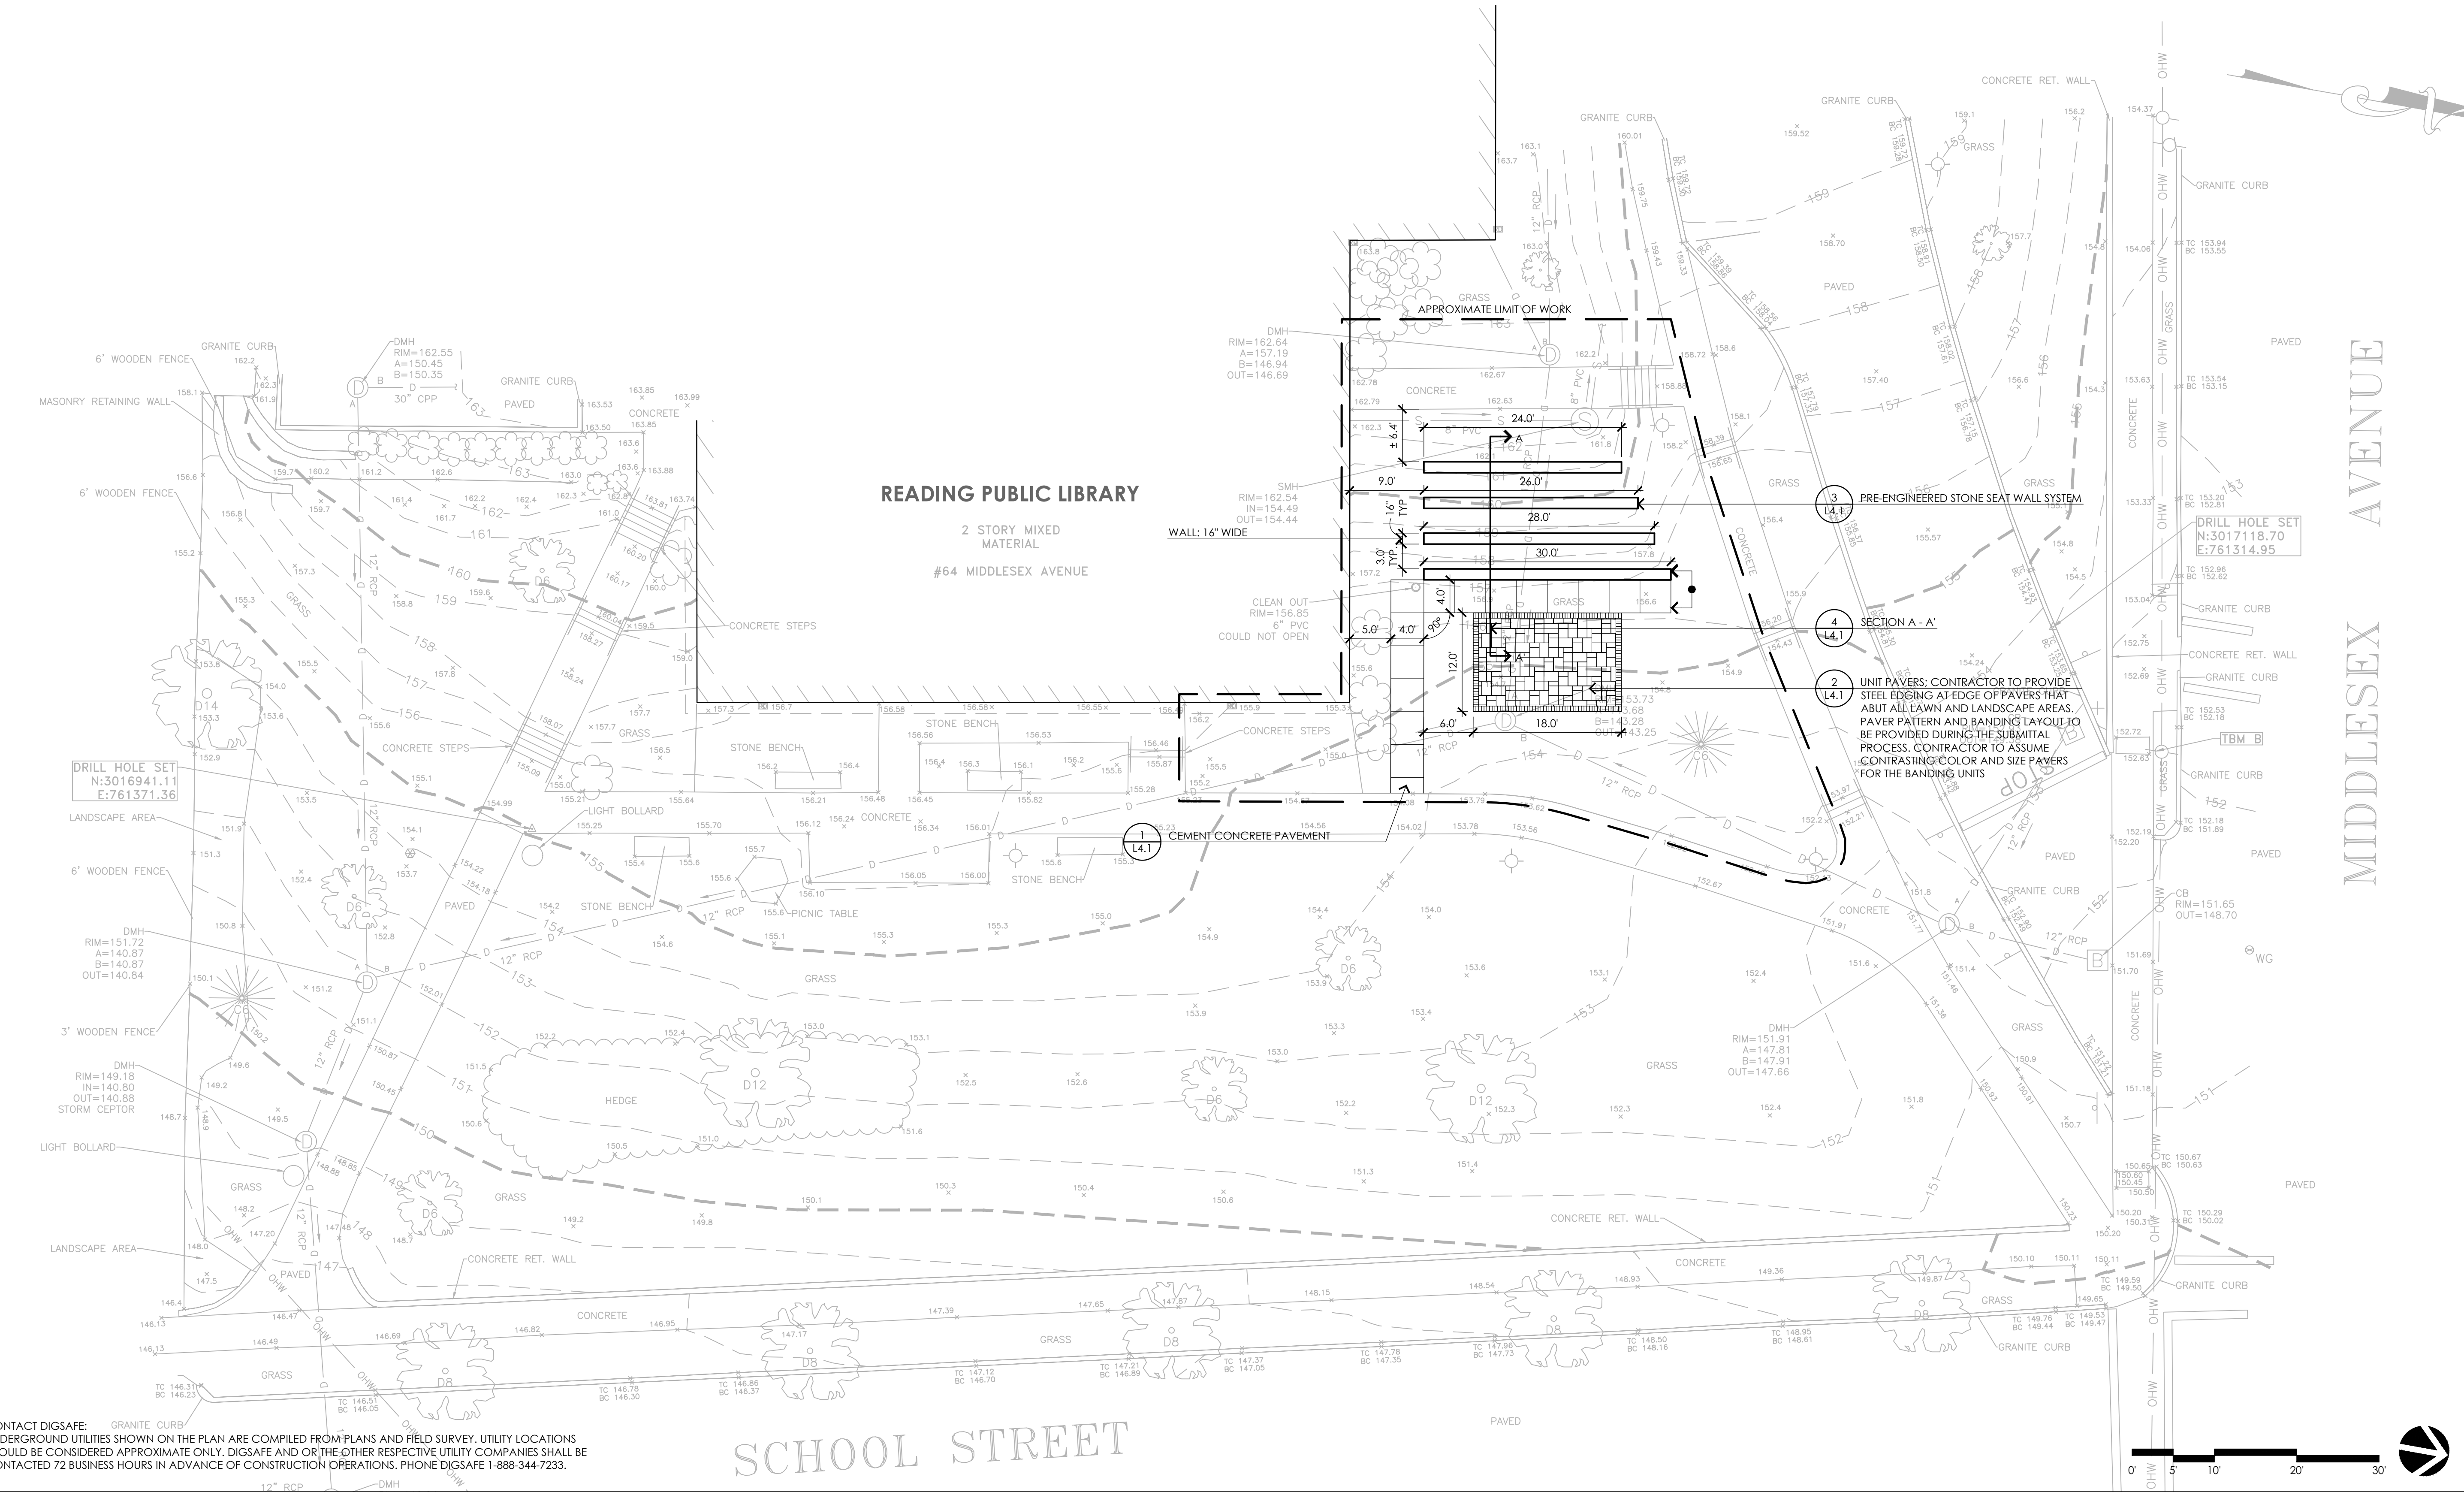

CONSULTANTS

SURVEY: -
REED LAND SURVEYING INC.

READING PUBLIC LIBRARY

Reading, Massachusetts

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

REVISIONS:

NO.	DATE	DESCRIPTION

SCALE:	1"=10'-0"
PROJECT NO.:	25020.00
FILE:	25020.00-L1.1-LM_PLAN.dwg
DRAWN:	AJA
CHECKED:	SRC/HCG

SEAL:

SHEET TITLE:

LAYOUT AND
MATERIALS PLAN

SHEET NO:

L1.1

1. EXISTING CONDITIONS INFORMATION IS REPRODUCED FROM THE SURVEY PREPARED BY REED LAND SURVEYING INC., LOCATED AT 109 RHODE ISLAND ROAD, SUITE 4A, LAKEVILLE, MA, AND DATED APRIL 21, 2025.
2. THE LOCATIONS OF UNDERGROUND UTILITIES SHOWN ARE BASED ON THE SURVEY REFERENCED ABOVE. THE CONTRACTOR SHALL NOTIFY DIGSAFE AND THE PROPER LOCAL AUTHORITIES OR RESPECTIVE UTILITY COMPANIES TO CONFIRM THE LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. ANY DAMAGE DUE TO FAILURE OF THE CONTRACTOR TO CONTACT THE PROPER AUTHORITIES SHALL BE BORNE BY THE CONTRACTOR.
3. CONTRACTOR SHALL VERIFY EXISTING GRADES AND NOTIFY THE OWNER'S REPRESENTATIVE OF ANY DISCREPANCIES.
4. WHERE AN EXISTING UTILITY IS FOUND TO CONFLICT WITH THE PROPOSED WORK, THE LOCATION, ELEVATION, AND SIZE OF THE UTILITY SHALL BE ACCURATELY DETERMINED WITHOUT DELAY BY THE CONTRACTOR, AND THE INFORMATION FURNISHED TO THE OWNER'S REPRESENTATIVE FOR RESOLUTION OF THE CONFLICT.
5. THE CONTRACTOR SHALL MAKE ARRANGEMENTS FOR THE ALTERATION AND ADJUSTMENT OF ALL ELECTRIC, TELEPHONE, AND ANY OTHER PRIVATE UTILITIES BY THE UTILITY COMPANY.
6. AREAS OUTSIDE THE LIMITS OF PROPOSED WORK DISTURBED BY THE CONTRACTOR'S OPERATIONS SHALL BE RESTORED BY THE CONTRACTOR TO THEIR ORIGINAL CONDITION, AT THE CONTRACTOR'S EXPENSE.
7. PROTECT AND MAINTAIN EXISTING ON-SITE DRAINAGE STRUCTURES AND PIPES UNLESS OTHERWISE NOTED, REFER TO UTILITY PLANS.
8. WHERE PROPOSED GRADES MEET EXISTING GRADES, CONTRACTOR SHALL BLEND GRADES TO PROVIDE A SMOOTH TRANSITION BETWEEN EXISTING AND NEW WORK. PONDING AT TRANSITION AREAS WILL NOT BE ALLOWED.
9. CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE AWAY FROM ALL BUILDING FOUNDATIONS, STRUCTURES AND PLANTING BEDS.



SURVEY -
REED LAND SURVEYING INC

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

[illegible]

SCALE:	1"=10'-0"
PROJECT NO.:	25020.00
FILE:	25020.00-L2.1-G_PLAN.dwg
DRAWN:	AJA
CHECKED:	SRC/HCG

SEAL:

SHEET TITLE:

GRADING AND
UTILITY PLAN

SHEET NO:

L2.1

PLANTING LEGEND

APPROXIMATE LIMIT OF WORK

LOAM AND SEED

PERENNIALS, GROUNDCOVER, & GRASSES

ORNAMENTAL TREE

DECIDUOUS TREE

SHRUB

PLANTING NOTES

- EXISTING CONDITIONS INFORMATION IS REPRODUCED FROM THE SURVEY PREPARED BY REED LAND SURVEYING INC., LOCATED AT 109 RHODE ISLAND ROAD, SUITE 4A, LAKEVILLE, MA, AND DATED APRIL 21, 2025.
- THE LOCATIONS OF UNDERGROUND UTILITIES SHOWN ARE BASED ON THE SURVEY REFERENCED ABOVE. THE CONTRACTOR SHALL NOTIFY DIGSAFE AND THE PROPER LOCAL AUTHORITIES OR RESPECTIVE UTILITY COMPANIES TO CONFIRM THE LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK. ANY DAMAGE DUE TO FAILURE OF THE CONTRACTOR TO CONTACT THE PROPER AUTHORITIES SHALL BE BORNE BY THE CONTRACTOR.
- CONTRACTOR SHALL BEGIN MAINTENANCE IMMEDIATELY AFTER PLANTING AND WILL CONTINUE UNTIL FINAL WRITTEN ACCEPTANCE OF PLANT MATERIAL.
- CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE AWAY FROM PROPOSED BUILDING, STRUCTURES, AND PLANTING BEDS.
- THE LANDSCAPE CONTRACTOR SHALL SUPPLY ALL PLANT MATERIALS IN QUANTITIES SUFFICIENT TO COMPLETE ALL PLANTINGS SHOWN ON THIS DRAWING.
- ALL MATERIALS SHALL CONFORM TO THE GUIDELINES ESTABLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION.
- ALL PLANTS SHALL BEAR THE SAME RELATIONSHIP TO FINISH GRADE AS TO ORIGINAL GRADES BEFORE DIGGING.
- FINAL LAYOUT OF PLANTINGS WILL BE IN THE FIELD PER THE DIRECTION OF THE LANDSCAPE ARCHITECT, PROVIDE A MINIMUM FORTY- EIGHT (48) HOURS NOTICE PRIOR TO BEGINNING FINAL LAYOUT AND PLANTING OPERATIONS.

- ALL PLANTS TO BE BALLED IN BURLAP OR CONTAINERIZED.
- ALL PLANTED AREAS TO BE EDGED AND MULCHED WITH AGED PINE BARK; PARTIALLY DECOMPOSED, NATURAL IN COLOR, FREE OF DYES AND FREE OF WOOD CHIPS THICKER THAN 1/4 INCH. APPLY GREEN WEED CONTROL AND PLANT FOOD AT PLANTING AREAS PRIOR TO MULCHING.
- LANDSCAPE PLANTING SOIL MIX: UTILIZE EXISTING SITE LOAM FROM STOCKPILES. THOROUGHLY INCORPORATE WITH COMPOST AS NEEDED PER SOILS ANALYSIS. FERTILIZE PER RECOMMENDED RATES IN SOIL ANALYSIS.
- THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIALS FOR ONE (1) FULL YEAR FROM DATE OF ACCEPTANCE.
- ALL PLANT MATERIALS ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT, AT THE NURSERY, AND AT THE SITE.
- ALL AREAS OF THE SITE WHICH HAVE BEEN DISTURBED AND NOT OTHERWISE DEVELOPED SHALL BE LOAMED AND SEEDED WITH A MINIMUM DEPTH OF 8" DEPTH TOPSOIL UNLESS OTHERWISE NOTED.
- SLOPES 3:1 AND GREATER SHALL RECEIVE STRAW BLANKET PRIOR TO SEEDING.
- AREAS TO BE PLANTED SHALL BE CLEARED OF EXISTING WEEDS, INVASIVE SPECIES, AND POISON IVY PRIOR TO PLANTING.

ALTERNATE #1 - PLANT SCHEDULE

SYMBOL	BOTANICAL NAME	COMMON NAME	SIZE	QTY.	NOTES
DECIDUOUS TREES					
QP	QUERCUS PALAISTRUS	PIN OAK	2-2.5"	1	B&B
ORNAMENTAL TREES					
AC	AMELANCHIER CANADENSIS	SHADBLOW SERVICEBERRY	5'-6" HT.	1	B&B, MULTI-STEM
SHRUBS					
CA	CEANOTHUS AMERICANOS	NEW JERSEY TEA	3 GAL.	5	SPACE 36" O.C
RI	RUBUS IDAEUS	RED RASBERRY	3 GAL.	3	SPACE 42" O.C
RV	ROSA VIRGINIA	VIRGINIA ROSE	3 GAL.	3	SPACE 48" O.C
VA	VIBURNUM ACERIFOLIUM	MAPLELEAF VIBURNUM	5 GAL.	1	AS SHOWN
PERENNIALS, GROUNDCOVERS AND GRASSES					
CP	CAREX PENSYLVANICA	SEDGE	1 GAL.	34	SPACE 12" O.C
DP	DENNISTAEDIA PUNCTILOBULA	HAY SCENTED FERN	1 GAL.	10	SPACE 30" O.C
ED	EURBIA DIVARICATA	WHITE WOOD-ASTER	1 GAL.	23	SPACE 18" O.C
RA	RHUS AROMATICA 'GRO-LOW'	FRAGRANT SUMAC	1 GAL.	7	SPACE 36" O.C
RH	RUDBECKIA HIRTA	BLACK-EYED SUSAN	1 GAL.	25	SPACE 24" O.C
SN	SALVIA NEMOROSA	WOODLAND SAGE	1 GAL.	43	SPACE 18" O.C

BIDDING NOTES:


- ALTERNATE #1** – ALL PLANT MATERIALS INCLUDING TREES, SHRUBS, PERENNIALS, AND GROUNDCOVERS SHALL BE INCLUDED AS PART OF THE CONTRACTORS **ALTERNATE #1** BID PRICE. ALL PLANT BED PREPARATION INCLUDING SPREADING OF LOAM SHALL BE INCLUDED AS PART OF THE **BASE BID**.
- ALL LOAMING AND SEEDING SHALL BE INCLUDED AS PART OF THE **BASE BID**.

1 LOAM AND SEED

NOT TO SCALE

NOTES:

- SHRUB SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE AS IT BORE TO NURSERY OR FIELD GRADE.
- WHERE SHRUBS OCCUR IN GROUPINGS IN PLANT BEDS, PROVIDE 2 - FOOT DEEP CONTINUOUS LOAM BED AND 3" MULCH CONTINUOUS TO CUT EDGES OF PLANT BED

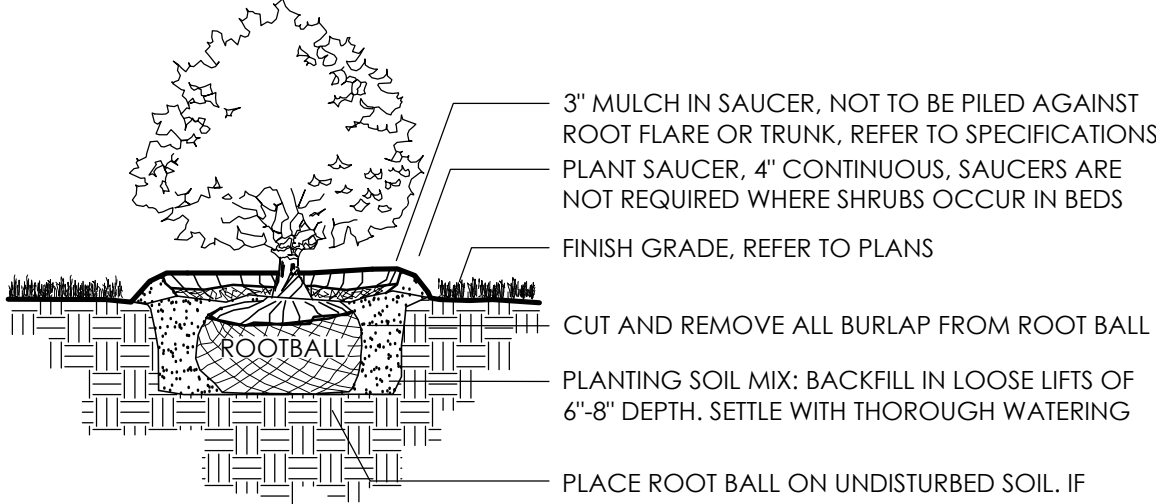


3 SHRUB

NOT TO SCALE

NOTES:

- TREE SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE AS IT BORE TO NURSERY OR FIELD GRADE.
- FOR TREES IN PLANT BEDS, PROVIDE 3" MULCH CONTINUOUS TO CUT EDGES OF PLANT BEDS.
- INSTALL WOOD STAKES AND TREE TIES IF THE FOLLOWING APPLY:
 - THE PLANTING LOCATION IS IN AN OPEN AREA AND IS SUSCEPTIBLE TO HIGH WINDS.
 - THE TREE IS SUBSTANTIAL IN SIZE.
 - THE PLANTING SOILS AREA SANDY OR LOOSE IN TEXTURE.
- TREE STAKES AND TIES SHALL BE REMOVED AFTER ONE YEAR.
- REMOVE ALL LABELS, TAGS, AND FOREIGN MATERIALS FROM LIMBS.

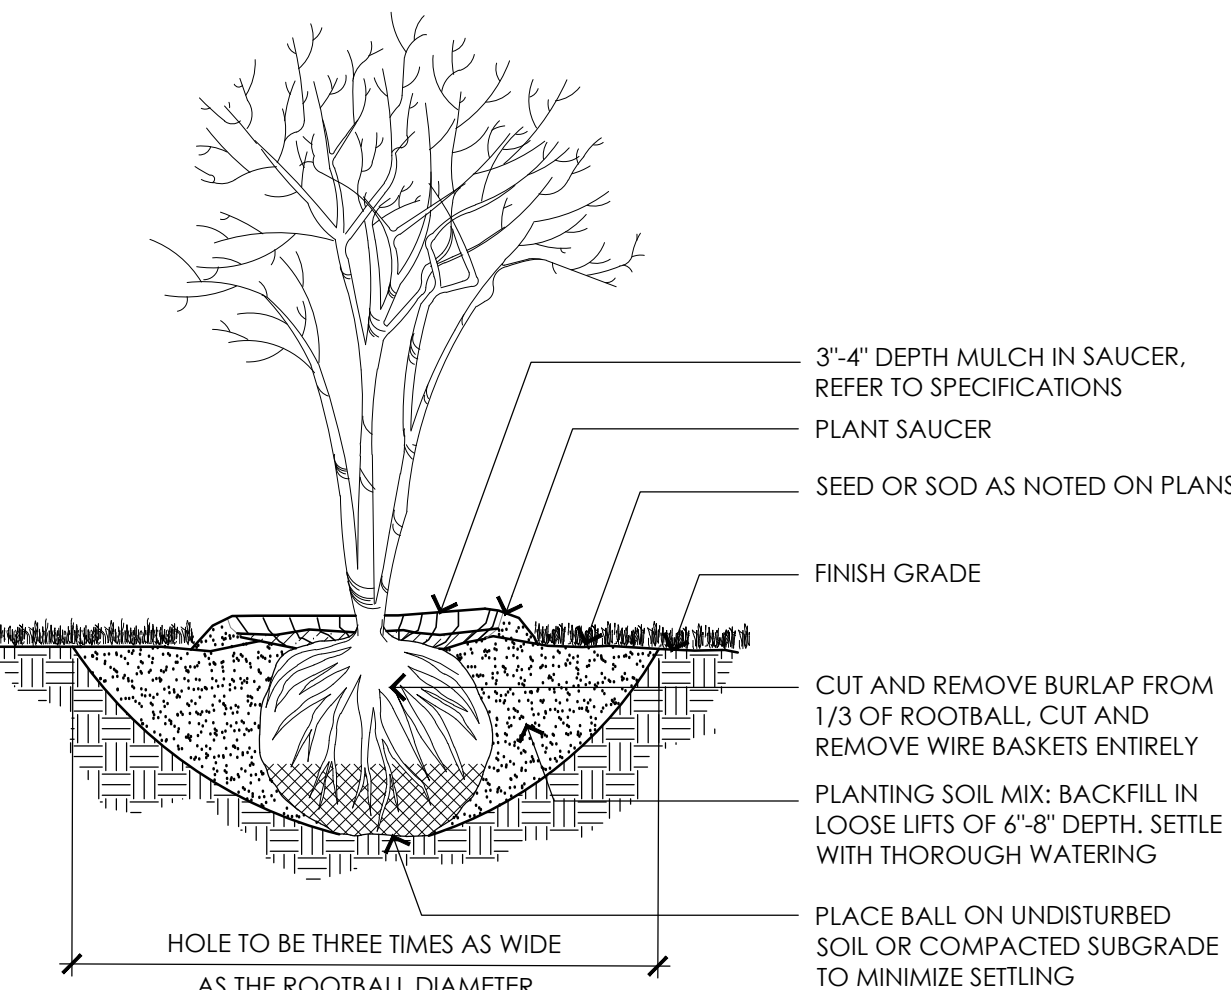

4 MULTI-STEM TREE

NOT TO SCALE


CONTACT DIGSAFE: UNDERGROUND UTILITIES SHOWN ON THE PLAN ARE COMPILED FROM PLANS AND FIELD SURVEY. UTILITY LOCATIONS SHOULD BE CONSIDERED APPROXIMATE ONLY. DIGSAFE AND OR THE OTHER RESPECTIVE UTILITY COMPANIES SHALL BE CONTACTED 72 BUSINESS HOURS IN ADVANCE OF CONSTRUCTION OPERATIONS. PHONE DIGSAFE 1-888-344-7233.

2 PERENNIALS, GROUNDCOVER, AND GRASSES

NOT TO SCALE

NOTES:

- SHRUB SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE AS IT BORE TO NURSERY OR FIELD GRADE.
- WHERE SHRUBS OCCUR IN GROUPINGS IN PLANT BEDS, PROVIDE 2 - FOOT DEEP CONTINUOUS LOAM BED AND 3" MULCH CONTINUOUS TO CUT EDGES OF PLANT BED

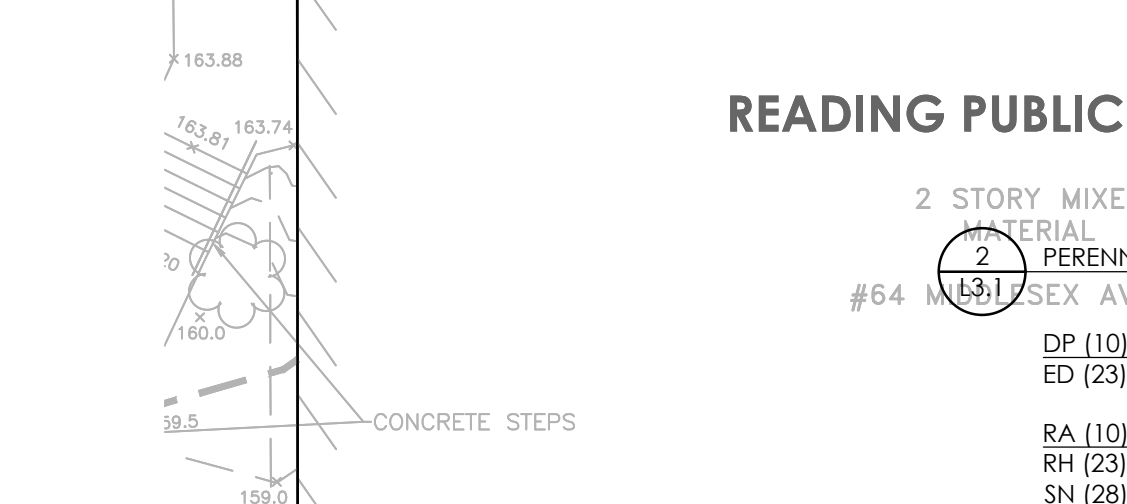


5 DECIDUOUS TREE

NOT TO SCALE

NOTES:


- TREE SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE AS IT BORE TO NURSERY OR FIELD GRADE.
- FOR TREES IN PLANT BEDS, PROVIDE 3" MULCH CONTINUOUS TO CUT EDGES OF PLANT BEDS.
- INSTALL WOOD STAKES AND TREE TIES IF THE FOLLOWING APPLY:
 - THE PLANTING LOCATION IS IN AN OPEN AREA AND IS SUSCEPTIBLE TO HIGH WINDS.
 - THE TREE IS SUBSTANTIAL IN SIZE.
 - THE PLANTING SOILS AREA SANDY OR LOOSE IN TEXTURE.
- TREE STAKES AND TIES SHALL BE REMOVED AFTER ONE YEAR.
- REMOVE ALL LABELS, TAGS, AND FOREIGN MATERIALS FROM LIMBS.

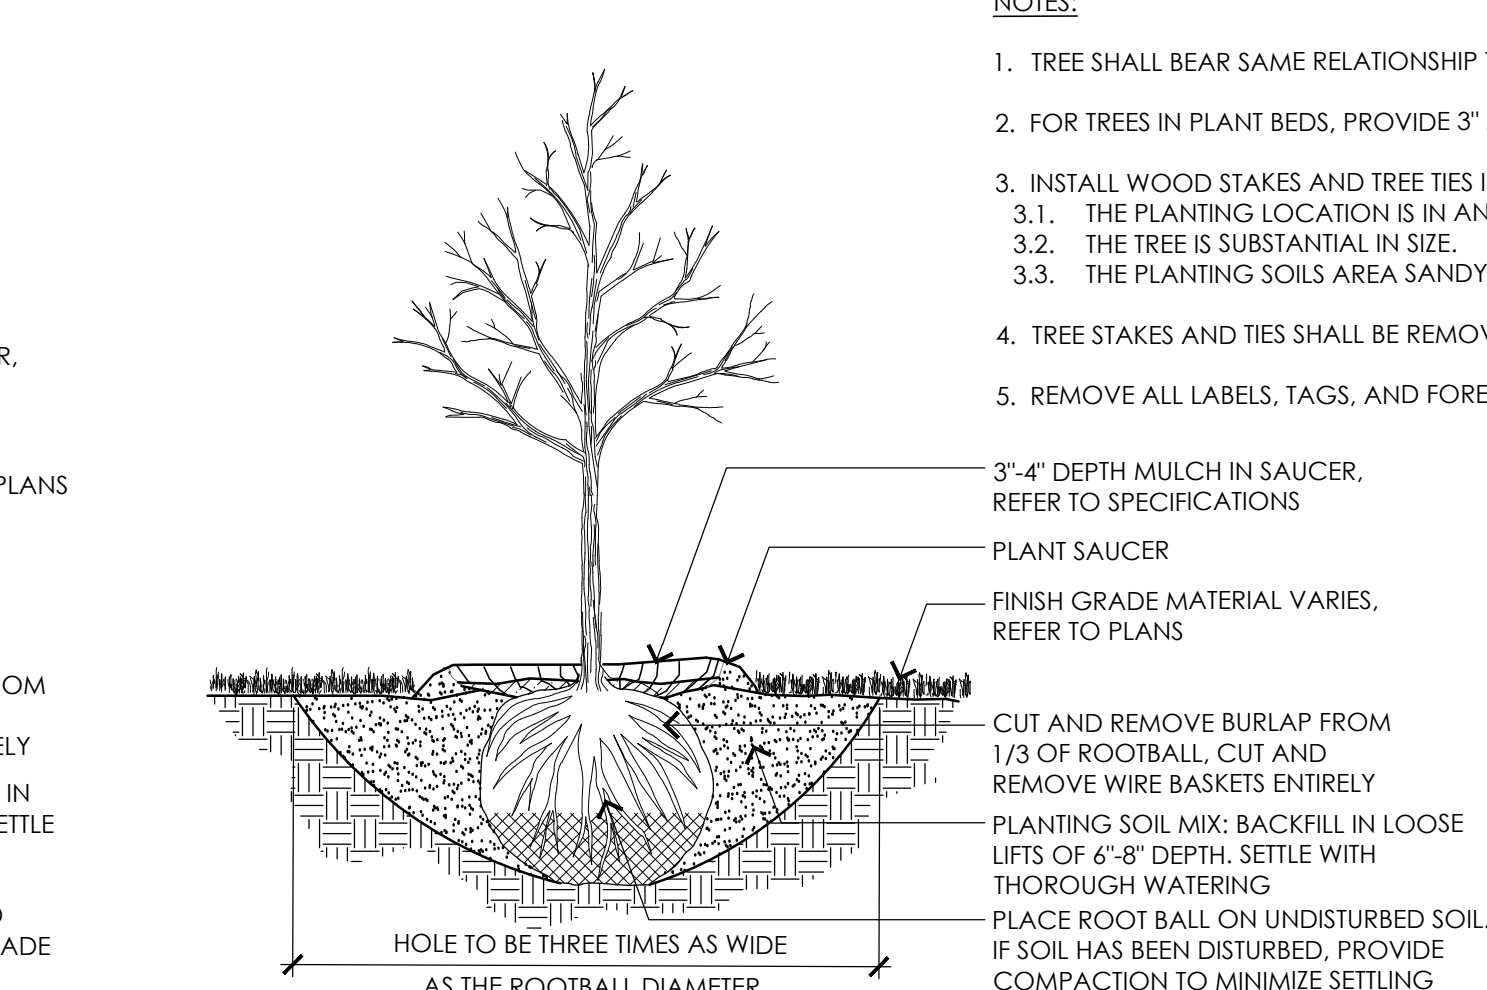

5 DECIDUOUS TREE

NOT TO SCALE

CONTACT DIGSAFE: UNDERGROUND UTILITIES SHOWN ON THE PLAN ARE COMPILED FROM PLANS AND FIELD SURVEY. UTILITY LOCATIONS SHOULD BE CONSIDERED APPROXIMATE ONLY. DIGSAFE AND OR THE OTHER RESPECTIVE UTILITY COMPANIES SHALL BE CONTACTED 72 BUSINESS HOURS IN ADVANCE OF CONSTRUCTION OPERATIONS. PHONE DIGSAFE 1-888-344-7233.

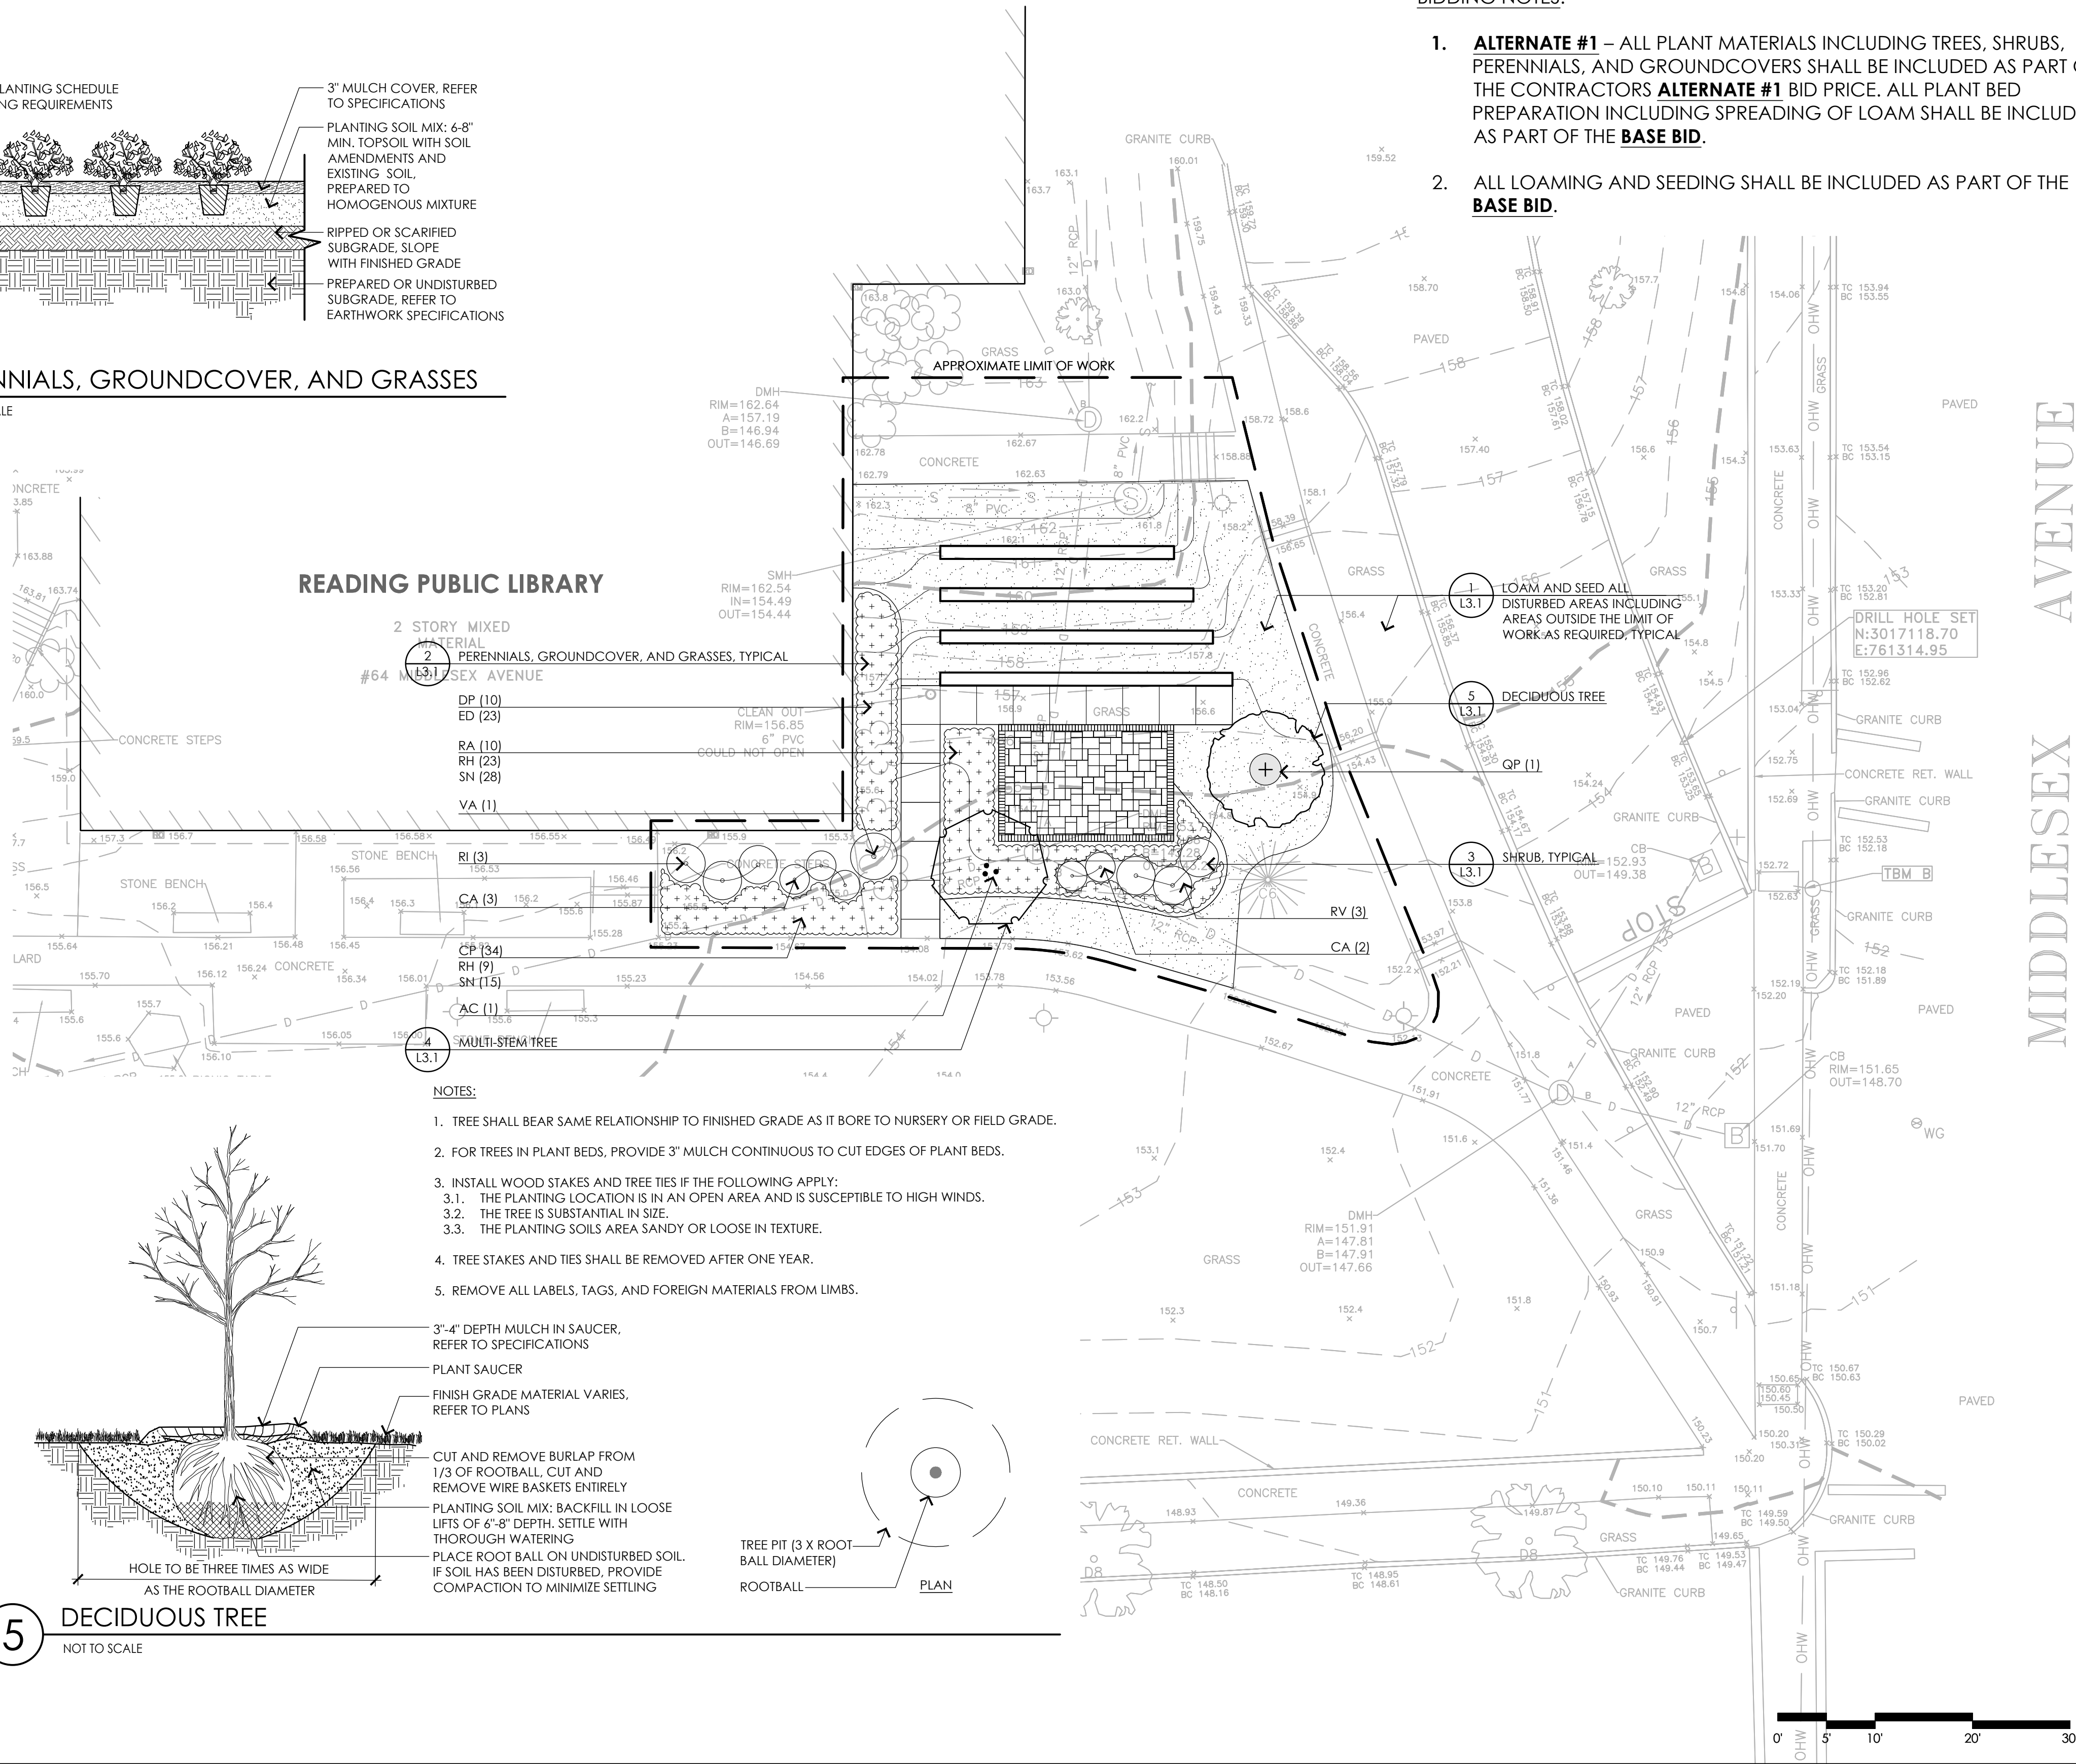

CONSULTANTS

SURVEY: -
REED LAND SURVEYING INC.

READING PUBLIC LIBRARY

Reading, Massachusetts

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

REVISIONS:

NO. DATE DESCRIPTION

NO.	DATE	DESCRIPTION

SCALE:

1"=10'-0"

PROJECT NO.: 25020.00

FILE: 25020.00-L3.1-P_PLAN.dwg

DRAWN: AJA

CHECKED: SRC/HCG

SEAL:

SHEET TITLE:



PLANTING PLAN
AND DETAILS

SHEET NO:

L3.1


NOTE:

1. PROVIDE LIGHT BROOM FINISH PERPENDICULAR TO FLOW OF TRAFFIC.

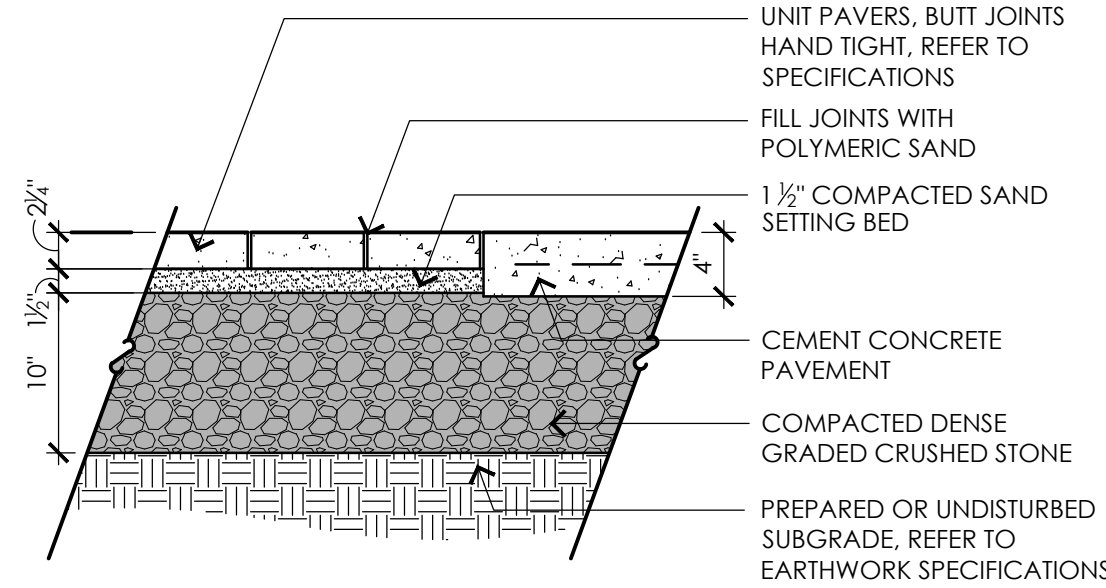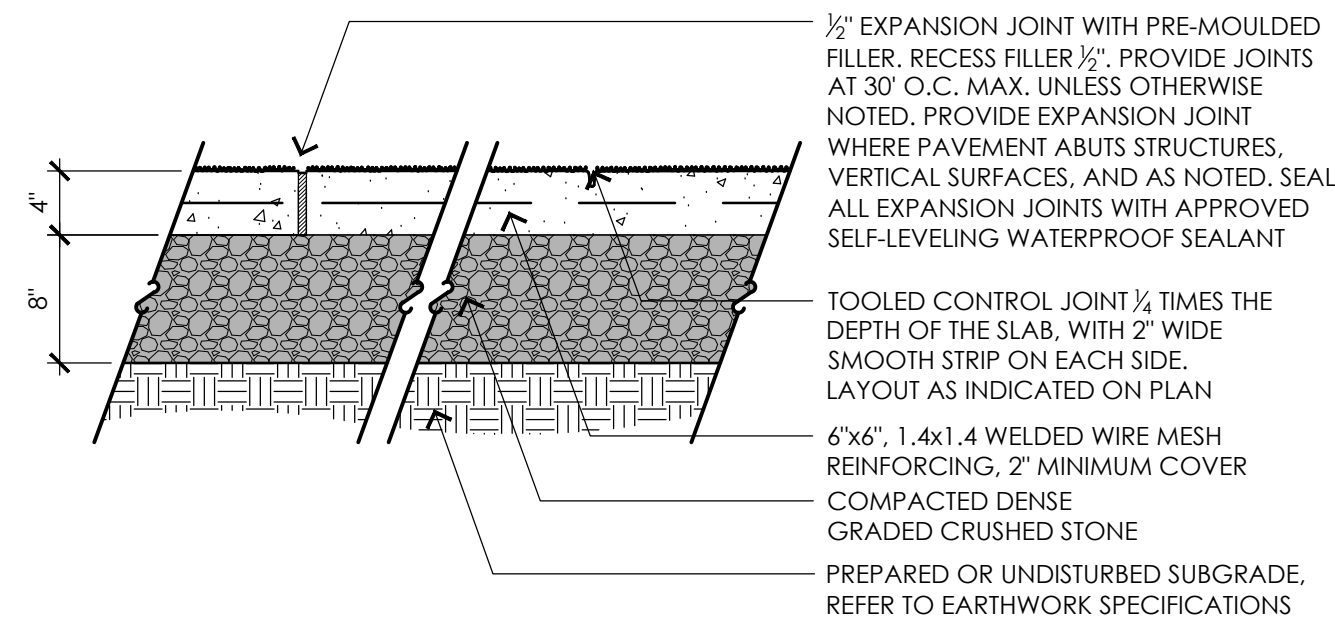

NOTES:

1. DRAWING SHOWN FOR GENERAL REFERENCE, INTENT, AND PRICING ONLY. FINAL LAYOUT AND DETAILS SHALL BE PER APPROVED SHOP DRAWINGS AND STAMPED STRUCTURAL DRAWINGS.
2. CONTRACTOR SHALL PROVIDE STAMPED STRUCTURAL DRAWINGS BY A ENGINEER LICENSED IN THE STATE OF MASSACHUSETTS. CONTRACTOR SHALL ASSUME ALL COSTS AS PART OF THEIR BID TO INCLUDE STRUCTURAL DESIGN AND NECESSARY REINFORCEMENT. CONTRACTOR SHALL NOT RECEIVE ADDITIONAL COMPENSATION DURING CONSTRUCTION FOR COSTS ASSOCIATED WITH THE DESIGN OR CONSTRUCTION OF RETAINING WALLS.
3. SHOP DRAWINGS SHALL BE PROVIDED TO OWNER'S REPRESENTATIVE FOR REVIEW.

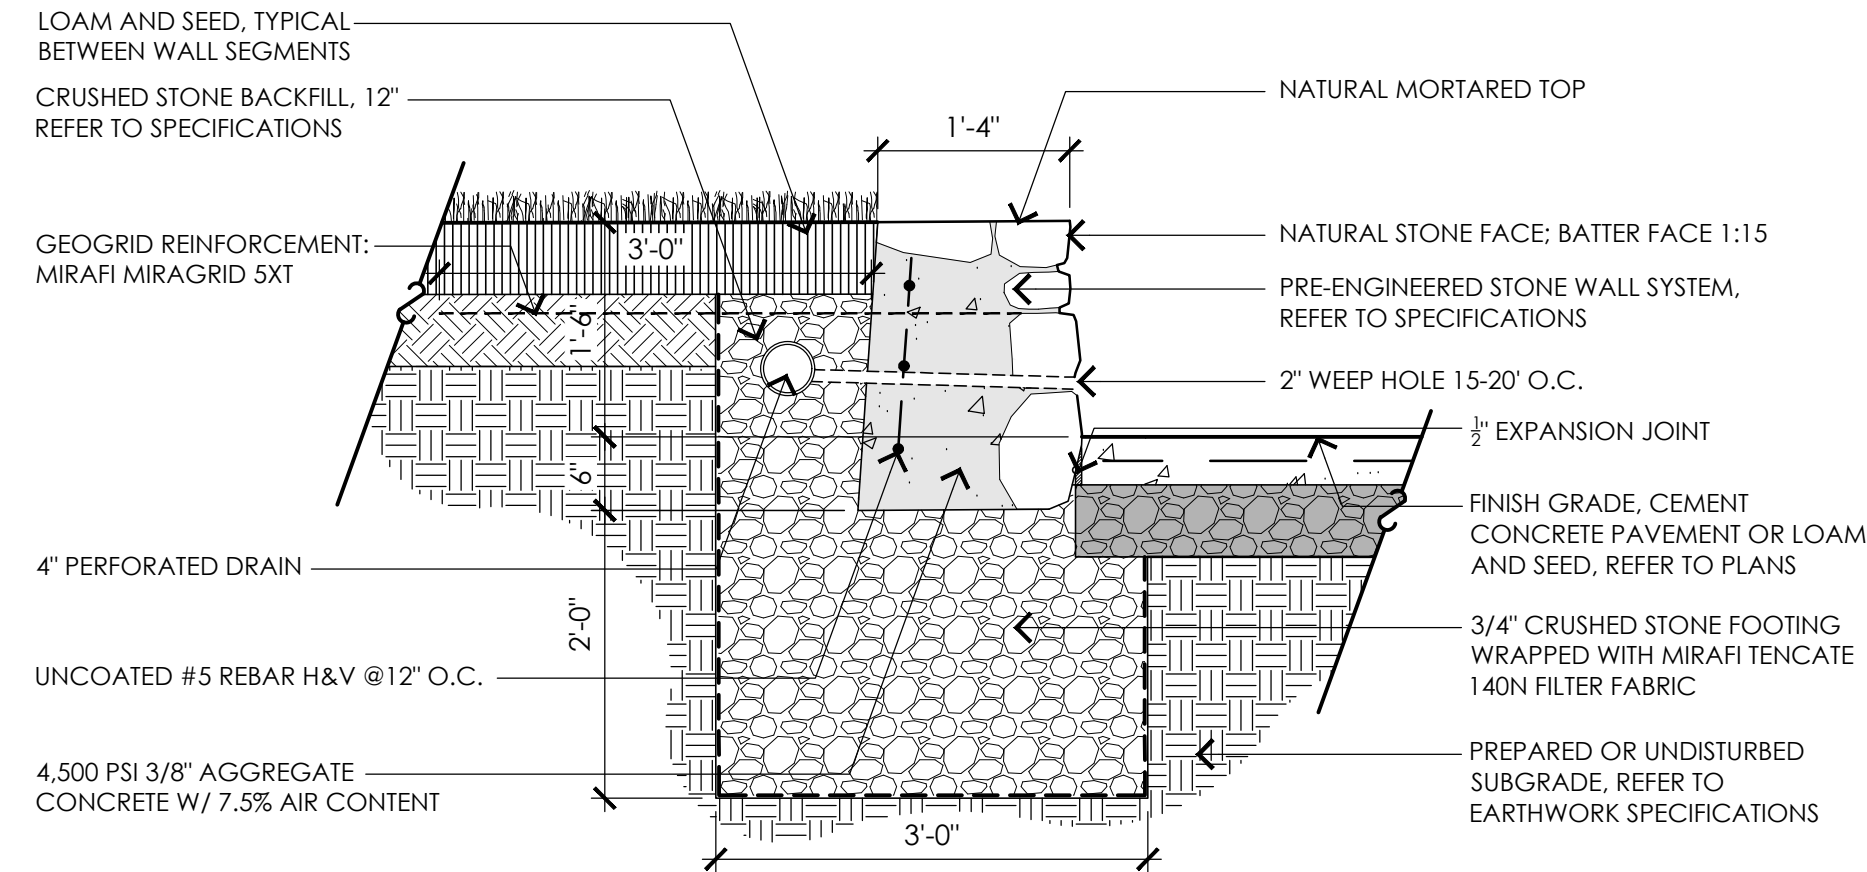

1 CEMENT CONCRETE PAVEMENT

NOT TO SCALE

2 UNIT PAVERS


NOT TO SCALE

3 PRE-ENGINEERED STONE SEAT WALL SYSTEM

NOT TO SCALE

NATURAL STONE WALL VENEER PRECEDENT IMAGE

TAN GRANITE IN ASHLAR PATTERN - REFER TO SPECIFICATIONS

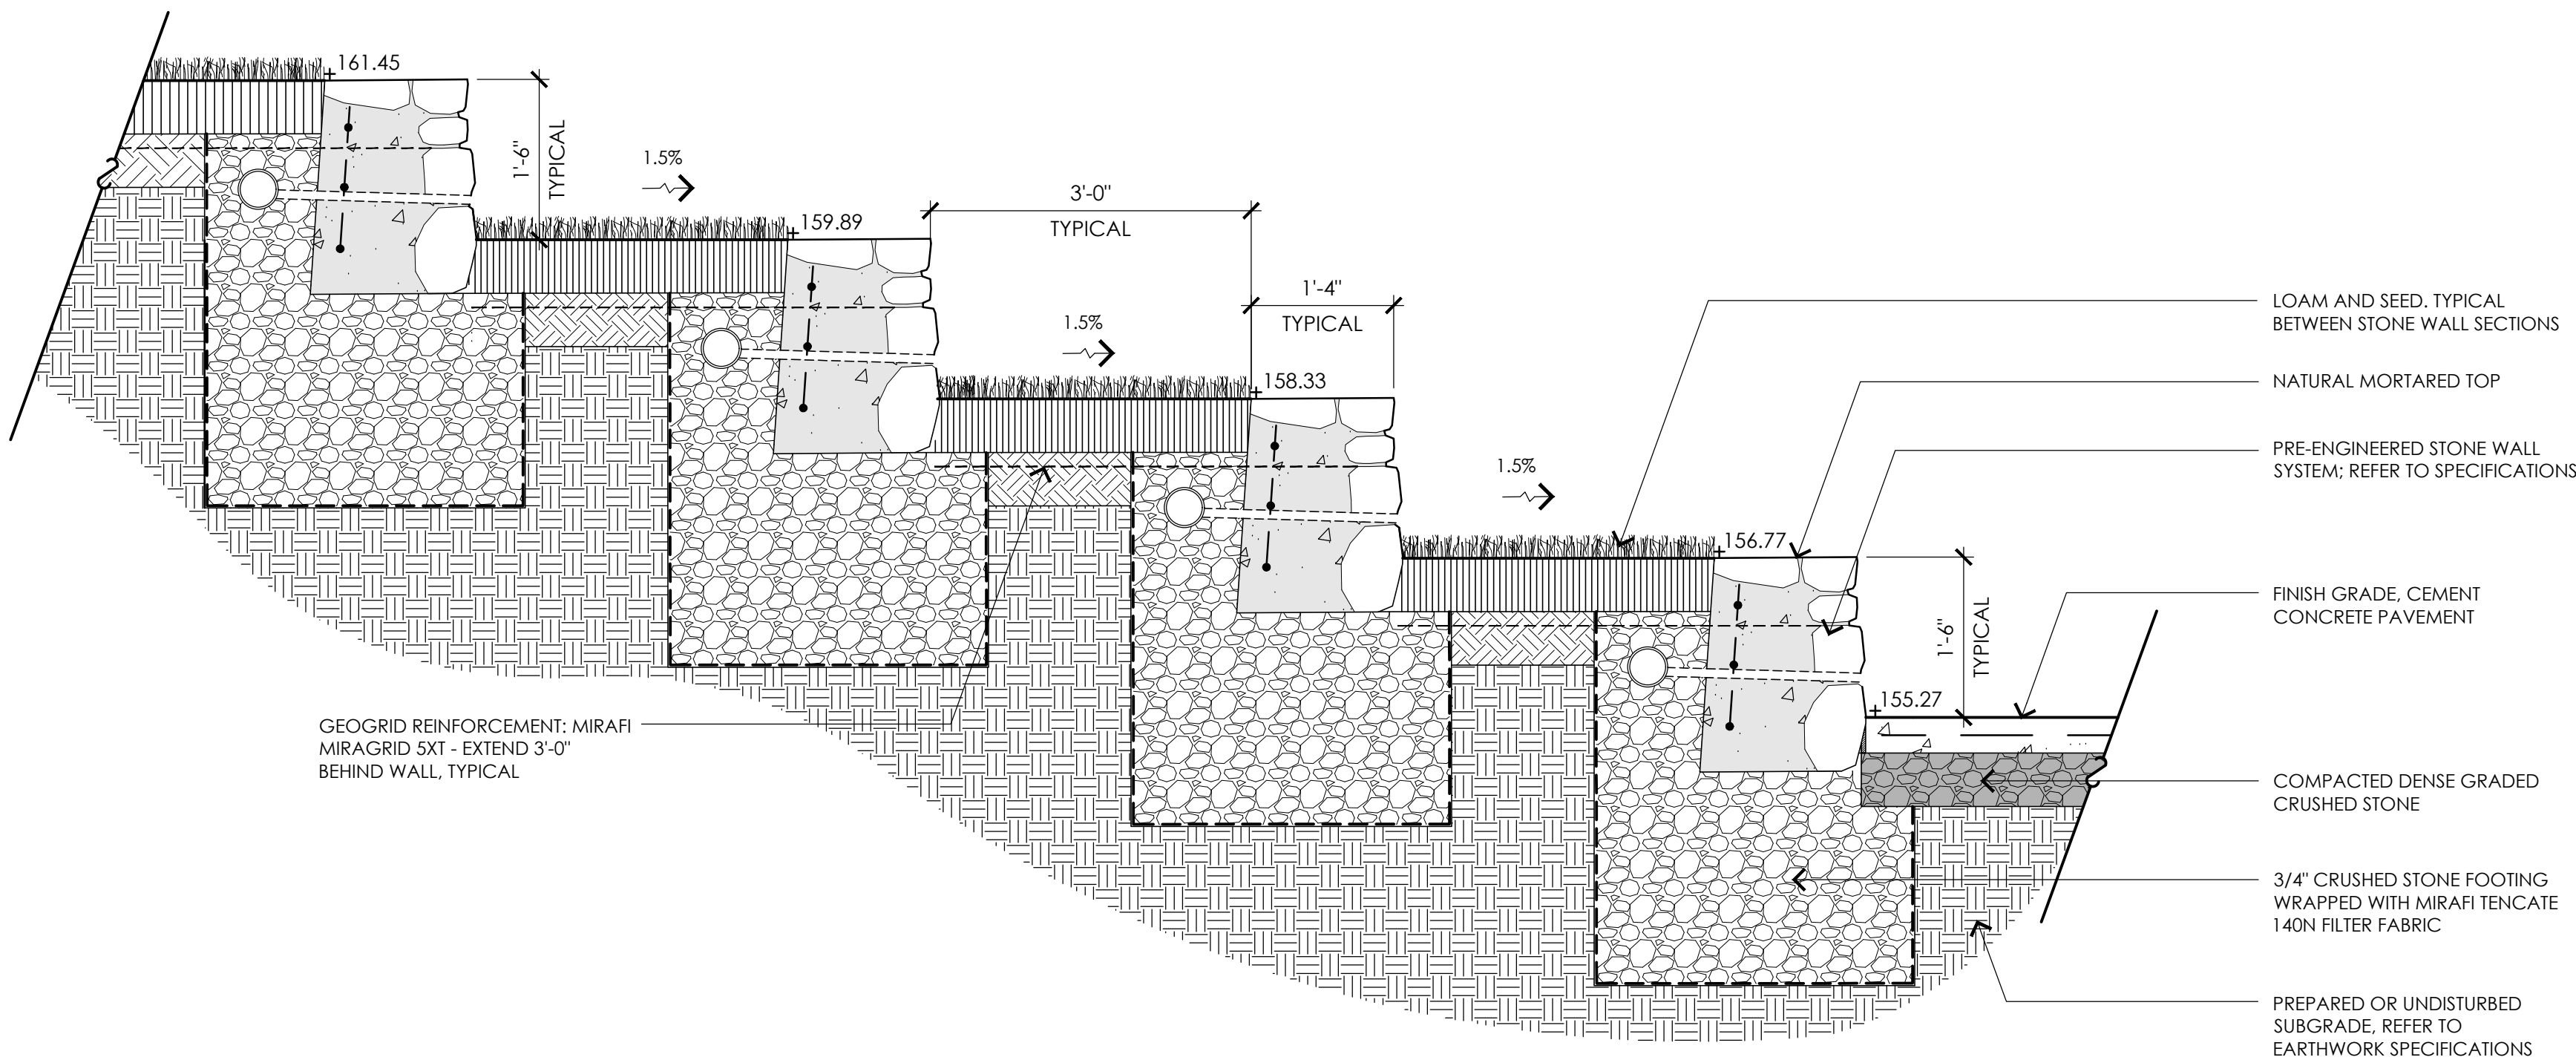

4 SECTION A - A'

NOT TO SCALE

CONSULTANTS

SURVEY -
REED LAND SURVEYING INC.

READING PUBLIC LIBRARY

Reading, Massachusetts

TERRACE AND LANDSCAPE IMPROVEMENTS

Bid Documents
July 23, 2025

REVISIONS:

NO.	DATE	DESCRIPTION

SCALE:	AS NOTED
PROJECT NO.:	25020.00
FILE:	25020.00-L4.1-DET_1.dwg
DRAWN:	MJD
CHECKED:	SRC/HCG

SEAL:

SHEET TITLE:

DETAIL SHEET I

SHEET NO:

L4.1