


MODEL STUDIO - HILYARD SITE LAYOUT / BUILDING INTERFACES

Product-development test data only - no survey, engineering, capacity, approval, or code-compliance claim

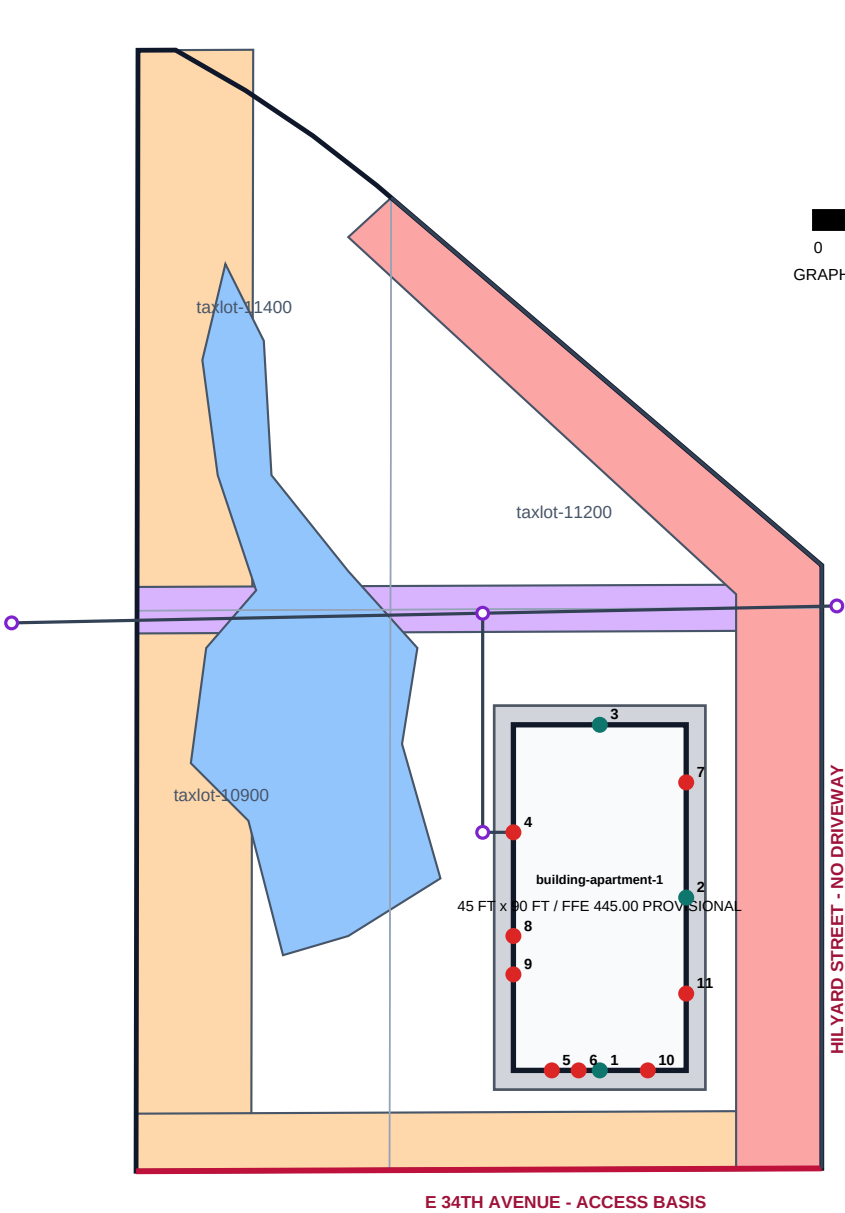

BASIS / CONTROL

Horizontal: EPSG:6823, international feet
DRAWING GRID ORIGIN: E 186225.00 / N 98450.00
Vertical: NAVD88 feet; benchmark and elevations UNKNOWN
Taxlots: City GIS reference-derived; NOT A SURVEY
Replace taxlot geometry first when a boundary survey arrives
Constraints: dimensioned/digitized reference geometry
Output parity tolerance: 0.01 ft (not source accuracy)
Sanitary routing is on MS-02/MS-03; capacity/approval unknown

BUILDING INTERFACES - PERMANENT TERMINAL IDS


- 01 entry-south-primary [pedestrian]
- 02 entry-east-service [service]
- 03 entry-north-pedestrian [pedestrian]
- 04 penetration-sanitary [sanitary]
- 05 penetration-domestic-water [domestic_water]
- 06 penetration-fire-water [fire_water]
- 07 penetration-roof-drainage [roof_drainage]
- 08 penetration-electric [electric]
- 09 penetration-telecom-fiber [telecom_fiber]
- 10 penetration-gas [gas]
- 11 penetration-site-lighting [site_lighting]

CONSTRAINT LEGEND

- constraint-eweb-west
- constraint-eweb-south
- constraint-sanitary-easement
- constraint-row-dedication
- constraint-wetland

MODEL STUDIO - HILYARD SANITARY SEWER PLAN

Reference GIS context plus reviewed-assumption fictional service; no survey, capacity, tie-in approval, or final grading claim

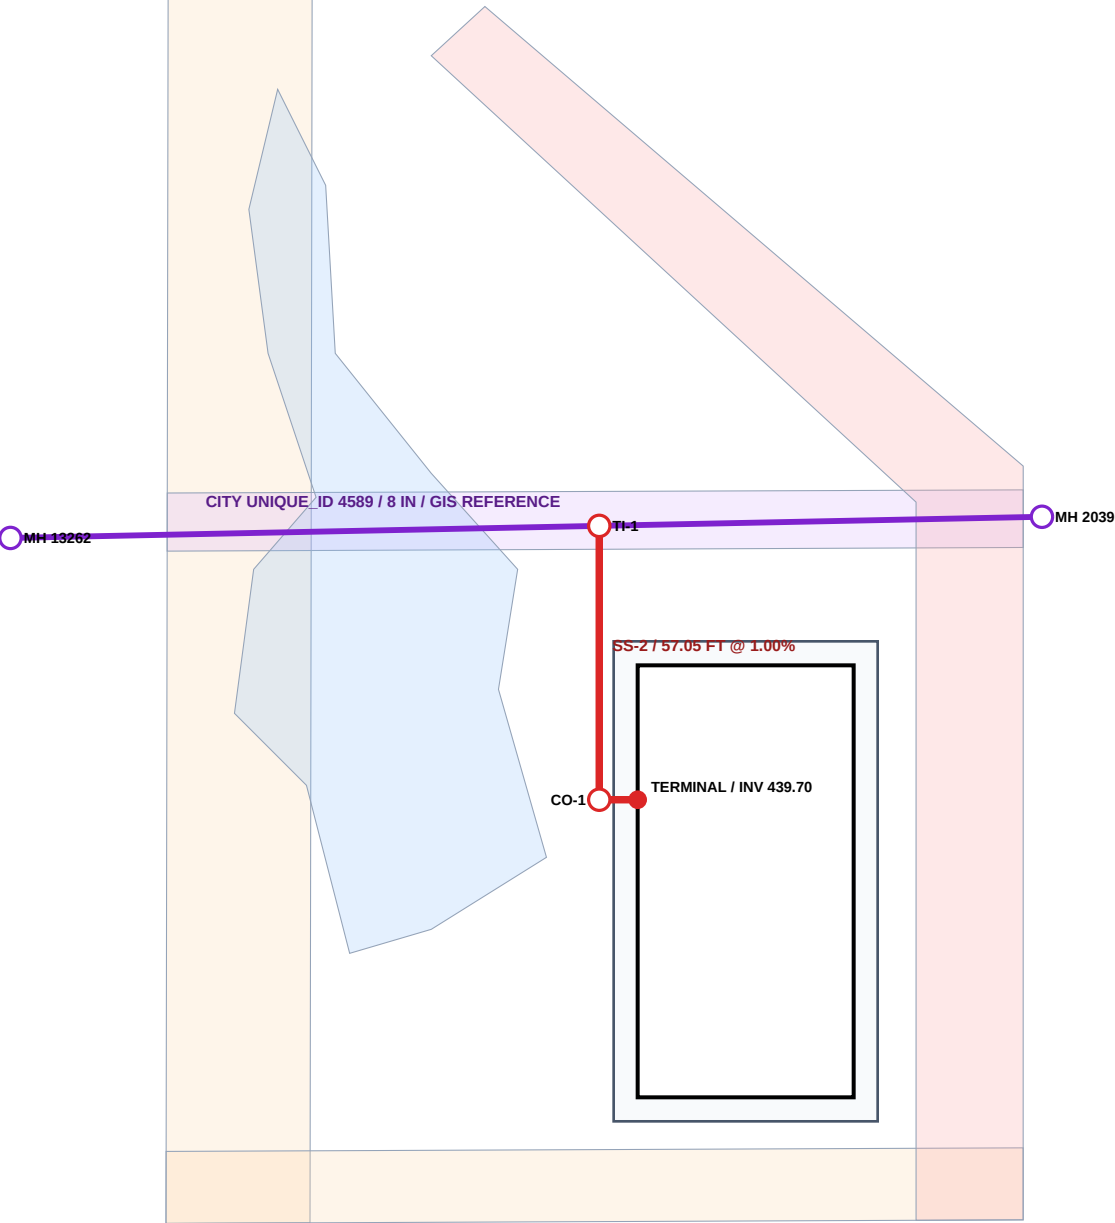

SANITARY BASIS

City main: UNIQUE_ID 4589
8 IN / folded-form liner / reference GIS
GIS inverts: 438.87 -> 437.47 NAVD88
Proposed service: 6 IN PVC SDR35
SS-1: 8.00 FT @ 1.00%
SS-2: 57.05 FT @ 1.00%
TI-1 incoming INV 439.05 (assumed)
Public main INV at TI-1: 438.07 (interpolated)
Minimum cover checked: 4.00 FT
All proposed cover <5 FT: shallow review warning
Tie-in approval and capacity: UNKNOWN
Surface/FFE: PROVISIONAL; not survey control

FIELD WORKFLOW

- 1 Pothole/survey existing main
- 2 Obtain City tie and capacity acceptance
- 3 Verify FFE, terminal, and finished grade
- 4 Stake line/grade; inspect bedding
- 5 Test, inspect, backfill/compact
- 6 Capture as-built coordinates/inverts

STABLE ASSET IDS

sanitary-service-seg-01
sanitary-service-seg-02
sanitary-cleanout-01
sanitary-tie-in-01
sanitary-public-main-4589-upstream
sanitary-public-main-4589-downstream

FICTIONAL — TEST DATA — NOT FOR CONSTRUCTION

MODEL STUDIO - HILYARD SANITARY SEWER PROFILE

Stations follow penetration-sanitary to TI-1; all proposed vertical values are provisional test assumptions



SEGMENT	STATIONS	LENGTH	SLOPE	INVERTS NAVD88	COVER	MATERIAL
san-edge-service-01	0+00.00 - 0+08.00	8.00 FT	1.00%	439.70 -> 439.62	4.06-4.10 FT	6 IN PVC SDR35
san-edge-service-02	0+08.00 - 0+65.05	57.05 FT	1.00%	439.62 -> 439.05	4.06-4.55 FT	6 IN PVC SDR35

FICTIONAL — TEST DATA — NOT FOR CONSTRUCTION